

(19)



Europäisches Patentamt

European Patent Office

Offic européen des brevets



(11)

**EP 1 067 789 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:

**10.01.2001 Bulletin 2001/02**

(51) Int. Cl.<sup>7</sup>: **H04N 5/913, H04N 9/82**

(21) Application number: **00114681.0**

(22) Date of filing: **07.07.2000**

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**

Designated Extension States:

**AL LT LV MK RO SI**

(30) Priority: **09.07.1999 JP 19559299**

(71) Applicant:

**Matsushita Electric Industrial Co., Ltd.  
Kadoma-shi, Osaka 571-8501 (JP)**

(72) Inventors:

- **Asada, Shin**  
**Neyagawa-shi, Osaka-fu 572-0055 (JP)**

- **Tsuga, Kazuhiro**

**Takarazuka-shi, Hyogo-ken 665-0803 (JP)**

- **Murase, Kaoru,**

**Purejierukurihara 105**

**Ikoma-gun, Nara-ken 636-0133 (JP)**

- **Okada, Tomoyuki**

**Katano-shi, Osaka-fu 576-0021 (JP)**

(74) Representative:


**Grünecker, Kinkeldey,  
Stockmair & Schwanhäusser  
Anwaltssozietät  
Maximilianstrasse 58  
80538 München (DE)**

(54) **An optical disc, a recorder, a player, a recording method, and a reproducing method that are all used for the optical disc**

(57) A video object is recorded on an optical disc. The video object is composed of at least one video object unit, and each video object unit contains control information and video data and has a presentation time

of one second or shorter. The control information relates to display control and copying control for the video object unit.

**FIG. 1**

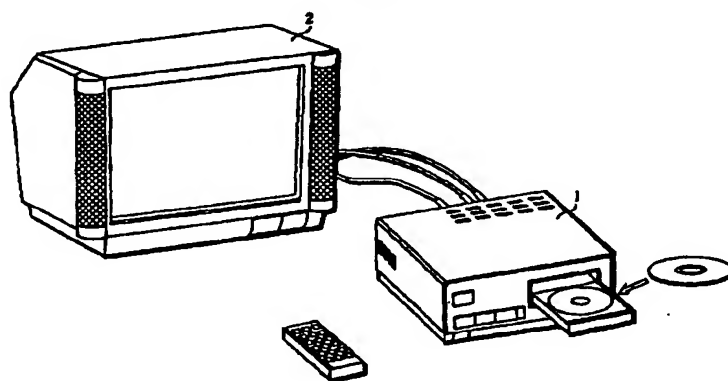

**EP 1 067 789 A1**

## Descripti n

## BACKGROUND OF THE INVENTION

## (1) Field of the Invention

[0001] The present invention relates to an optical disc from and into which a read and a write can be performed and recording and reproducing methods to record and reproduce data on the optical disc. More specifically, the present invention relates to an optical disc on which video data is recorded, and recording and reproducing methods used for such optical disc.

## (2) Description of the Related Art

[0002] DVD-RAM (Digital Video Disc-Random Access Memory) has been recently developed in the field of rewritable optical discs. A DVD-RAM is a phase change optical disc with a several-GB capacity that exceeds the conventional limits of around 650 MB.

[0003] DVD-RAMs can be used by computers to store various kinds of data. In addition, there are hopes that DVD-RAMs will be used to record AV (audio video) data for audio and video. While common conventional recording devices such as video tape recorders (VTRs) record audio and video onto a magnetic tape, there are hopes that such recording will be performed by optical disc recorders that use optical discs.

[0004] An optical disc recorder/player that can be used in place of a standard VTR receives a TV (television) broadcast, converts (compresses) a TV signal in the received broadcast into digital AV data, and records the digital AV data onto a DVD-RAM. When reproducing the AV data, the optical disc recorder/player reads the AV data from the DVD-RAM, converts the read AV data into an analog AV signal, and outputs it to a display unit. The generated AV data conforms to MPEG (Motion Picture Expert Group) prescribed in ISO/IEC 13818 (International Standardization Organization/International Electrotechnical Commission).

[0005] With some recent analog TV broadcasts, digital data is multiplexed into a TV signal during a vertical blanking interval (hereafter called "VBI", with the digital data multiplexed during a VBI being called "VBI data"). In teletext broadcasting, for instance, text data is multiplexed as VBI data during VBIs.

[0006] In a TV (or video) signal conforming to NTSC (National Television System Committee) system, one frame (i.e., two fields) is composed of 525 horizontal scanning lines, and VBI data can be multiplexed during a period that corresponds to the tenth to twenty-first horizontal scanning lines during a VBI and a period that corresponds to the 273rd to the 284th scanning lines during a VBI.

[0007] In addition to text data, VBI data can be information such as letterbox control information and copy control information. The letterbox control information is

used to control display of an image with an aspect ratio of 4:3 on a display screen with an aspect ratio of 16:9 or 14:9. The copy control information shows whether VTRs are permitted to record the images. A method to multiplex such information as VBI data is defined, for instance, in Journal of the Institute of Television Engineers of Japan vol. 49 No. 9 (1995), and ETS300 294 (European Telecommunications Standards) "Television Systems 625-Line Television Wide Screen Signaling (WSS)".

[0008] The letterbox control information and the copy control information are multiplexed into a program or a commercial. As the VBI data can be multiplexed into each field, it is possible to change, for instance, display and copy protection settings only for a certain commercial by multiplexing VBI data into the certain commercial. More specifically, it is possible to change an aspect ratio of a display image and/or allow copying only for commercials by multiplexing appropriate VBI data during the commercial periods.

[0009] VTRs for S-VHS (Super Video Home System) are capable of recording a TV signal including VBI data onto a magnetic tape, reproducing the TV signal, and having the TV signal displayed on a display unit. This allows the display unit to recognize the multiplexed VBI data such as letterbox control information and to control the displaying of a letterbox image in synchronization with the TV signal.

[0010] However, when a conventional optical disc recorder/player receives the TV broadcast, encodes an analog TV signal in the broadcast into compressed digital data, and records the compressed data onto an optical disc, any VBI data in the TV signal will be lost. As a result, the conventional optical disc recorder/player cannot change the display style or copying permission during fifteen or thirty-second commercial periods when reproducing AV data from an optical disc.

## SUMMARY OF THE INVENTION

[0011] The present invention aims to provide an optical disc, an optical disc recorder, an optical disc player, an optical disc recording method, an optical disc reproducing method that can effectively use VBI data multiplexed into a video signal.

[0012] The above object can be achieved by an optical disc on which at least one video object is recorded. Each video object contains at least one video object unit, and each video object unit contains control information and video data, and has a presentation time of one second or shorter. The control information relates to at least one of: (a) display control for the video object unit; and (b) copying control for the video object unit.

[0013] The above object can be also achieved by an optical disc recorder that records a video object onto a recordable optical disc, including: an extracting unit for extracting data that has been multiplexed into an audio-

video signal, the data relating to at least one of: (a) display control; and (b) copying control: an encoding unit for encoding the audio-video signal to generate the video object containing at least one video object unit that has a presentation time of one second or shorter; an generating unit for generating, based on the extracted data, control information relating to at least one of: (a) display control for each video object unit in the video object; and (b) copying control for each video object unit in the video object; and a controlling unit for having the encoding unit to insert the generated control information into each video object unit.

**[0014]** The above object can be also achieved by an optical disc player that reproduces a video object recorded on an optical disc, the video object containing at least one video object unit that each has a presentation time of one second or shorter. The optical disc player includes: a reading unit for reading the video object from the optical disc; a separating unit for separating each video object unit in the read video object into video data, audio data, and control information; a decoding unit for decoding the video data and the audio data obtained by separating the video object unit to generate an audio-video signal corresponding to the video object unit; and a multiplexing unit for multiplexing additional data into the generated audio-video signal during vertical blanking intervals based on the control information that has been obtained by separating the video object unit.

**[0015]** Here, each video object may be generated from an analog video signal, and control information may indicate a content of data that is multiplexed into vertical blanking intervals in the analog video signal.

**[0016]** Here, the control information may show at least one of: (a) a display position for the video object unit; (b) copying management conditions for the video object unit; and (c) a source-material type for the video object unit.

**[0017]** With this construction, each video object unit contains control information, and so display control and copying control can be achieved for each video object unit, which is to say, different display and copying control can be performed for every second or lower. This enables to change, for instance, a display style or copying permission during a certain period, such as a commercial, of a program.

**[0018]** Here, each video object unit may contain one control pack and a plurality of video packs into which video data is placed. The control pack may be placed at a start of the video object unit and contains the control information.

**[0019]** For this construction, a control pack is located at a start of each video object unit. This simplifies an operation by an optical disc recorder to insert a control pack into each video object unit, and so can reduce the operation load of the optical disc recorder.

**[0020]** Here, the control information may further contain status information showing which parts of the

control information are valid.

**[0021]** As control information additionally contains status information, it becomes possible to insert a video object unit having valid information regarding display and copying control and a video object unit having invalid information regarding display and copying control into the same video object.

**[0022]** Here, the control information may contain letterbox control information that shows a display position of images for the video object unit on a screen.

**[0023]** For this construction, an optical disc player can perform letterbox control for each video object unit, that is, for every second or lower.

**[0024]** Here, the control information may show an aspect ratio of images for the video object unit.

**[0025]** For this construction, an aspect ratio can be set, for each video object unit, in control information.

**[0026]** Here, the control information may contain subtitle mode information showing a display position of subtitles for the video object unit.

**[0027]** This allows an optical disc player to control a display position of a subtitle for each video object unit.

**[0028]** Here, the control information may contain film/camera mode information that shows whether a source material of the video object unit was recorded either by a television camera or on a movie film.

**[0029]** For this construction, film/camera mode can be set, for each video object unit, in control information.

**[0030]** Here, the control information may contain information regarding Copy Generation Managing System to show whether to permit the video object unit to be copied onto another recording medium.

**[0031]** With this construction, information regarding Copy Generation Management System can be set for each video object unit, in control information.

**[0032]** Here, the control information may contain information regarding Analog Protection System (APS) to show a type of APS copy protection method used on an analog video signal based on which the video object unit was generated.

**[0033]** With this construction, information regarding Analog Protection System can be set, for each video object unit, in control information.

**[0034]** Here, the control information may contain source information that shows whether a source material of the video object unit is an analog pre-recorded package medium.

**[0035]** With this construction, source information can be set in control information for each video object unit.

**[0036]** Here, in addition to at least one video object that contains control information, at least one piece of stream information and a video object that contains no control information may be recorded on the recordable optical disc. Each piece of stream information may be associated with at least one video object, and contain: aspect information that shows an aspect ratio of the at least one video object associated with the piece of

stream information; and an application flag that shows either: (a) that the video object is encoded using the aspect ratio in the aspect information; or (b) that the video object is not necessarily encoded using the aspect ratio in the aspect information, and an aspect ratio in control information in each video object unit is used.

**[0037]** As this stream information is recorded separately from each video object, an optical disc player can obtain an aspect ratio in the stream information for each video object unit without needing to read the video object if an application flag is shown as "00b". In this way, the optical disc player can judge whether an aspect ratio of a video object or of each video object unit should be used for the video object, using the application flag. In addition, a size of a video object that contains no control information can be reduced by the size of this control information.

**[0038]** The above object can be also achieved by a recording to record a video object containing at least one video object unit onto an optical disc, including: an extracting step for extracting data that is multiplexed into an audio-video signal, the data relating to display control and copying control; an encoding step for encoding the audio-video signal to generate video data and audio data; a generating step for generating control information that relates to display control and copying control based on the extracted data; and a multiplexing step for multiplexing the control information, the video data, and the audio data that have been generated into a video object unit having a presentation time of one second or shorter.

**[0039]** The above object can be also achieved by a reproducing method to reproduce a video object recorded on an optical disc, including: a reading step for reading the video object from the optical disc, the video object containing at least one video object unit that each has a presentation time of one second or shorter; a separating step for separating each video object unit in the read video object into video data, audio data, and control information; a decoding step for decoding the video data and the audio data obtained by separating the video object unit to generate an audio-video signal corresponding to the video object unit; and a multiplexing step for multiplexing additional data into the generated audio-video signal during vertical blanking intervals based on the control information that has been obtained by separating the video object unit.

**[0040]** The above object can be also achieved by a program that is recorded on a computer-readable recording medium and that has a computer perform a recording operation to record a video object containing at least one video object unit onto an optical disc. The recording operation includes: an extracting step for extracting data that is multiplexed into an audio-video signal, the data relating to display control and copying control; an encoding step for encoding the audio-video signal to generate video data and audio data; a gener-

ating step for generating control information that relates to display control and copying control based on the extracted data; and a multiplexing step for multiplexing the control information, the video data, and the audio data that have been generated into a video object unit having a presentation time of one second or shorter.

**[0041]** The above object can be also achieved by a program that is recorded on a computer-readable recording medium and that has a computer perform a reproducing operation to reproduce a video object recorded on an optical disc. The reproducing operation includes: a reading step for reading the video object from the optical disc, the video object containing at least one video object unit that each has a presentation time of one second or shorter; a separating step for separating each video object unit in the read video object into video data, audio data, and control information; a decoding step for decoding the video data and the audio data obtained by separating the video object unit to generate an audio-video signal corresponding to the video object unit; and a multiplexing step for multiplexing additional data into the generated audio-video signal during vertical blanking intervals based on the control information that has been obtained by separating the video object unit.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0042]** These and the other objects, advantages and features of the invention will become apparent from the following description thereof taken in conjunction with the accompanying drawings which illustrate a specific embodiment of the invention.

**[0043]** In the drawings:

FIG. 1 shows an external view of an optical disc recorder/player, a television set, and a remote controller;

FIG. 2 shows a lead-in area, a data area, a lead-out area within a region of the optical disc, and a construction of files stored in the data area;

FIG. 3 shows a data construction of a VR\_MOVIE.VRO file;

FIG. 4 shows a data construction of a control pack;

FIG. 5 shows a detailed bit configuration of display control information (DCI) in a control pack;

FIG. 6 shows a relationship between a screen size and a display image size;

FIG. 7 shows a detailed bit configuration of copy control information (CCI) in a control pack;

FIG. 8 shows a bit configuration of DCI CCI Status Information;

FIG. 9A shows a data construction of a VR\_MANGR.IFO file shown in FIG. 2 at different levels;

FIG. 9B shows a bit configuration of a Video Attribute (V\_ATR);

FIG. 9C shows an M\_VOB\_STIN

(Movie\_VOB\_Stream Information Number) contained in M\_AVFI (Movie\_AV File Information);  
 FIG. 10 is a block diagram showing a detailed construction of an optical disc recorder/player in FIG. 1;  
 FIG. 11 is a block diagram showing a detailed construction of a VBI demodulator;  
 FIG. 12 is a flowchart showing the processing by the DCI generating unit to generate DCI;  
 FIG. 13 shows a conversion table for an aspect ratio of an NTSC (National Television System Committee) signal;  
 FIG. 14 shows a conversion table for an aspect ratio of a PALplus (Phase Alternation by Line) signal;  
 FIG. 15 shows a conversion table for Film/Camera Mode;  
 FIG. 16 shows a conversion table for Subtitling Mode;  
 FIG. 17 is a flowchart showing the detailed processing by the CCI generating unit;  
 FIG. 18 shows a conversion table for CGMS (Copy Generation Managing System);  
 FIG. 19 shows a conversion table for APSTB (Analog Protection System Trigger Bits);  
 FIG. 20 shows a conversion table for Source Information;  
 FIG. 21 is a block diagram showing a detailed construction of a DVD recorder;  
 FIG. 22 is a block diagram showing a detailed construction of an encoding unit;  
 FIG. 23 is a block diagram showing a detailed construction of a system encoder;  
 FIG. 24 is a flowchart showing the processing by a system controlling unit to control the encoding; and  
 FIG. 25 is a block diagram showing a detailed construction of a decoding unit.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0044] The following defines technological terms used in this specification.

##### ( i ) Video Object (VOB)

[0045] A video object (VOB) is stream data generated as a result of a real-time recording being performed once, and complies with a program stream prescribed in ISO/IEC 13181-1 "Information Technology - Generic Coding of Moving Pictures and Associated Audio Information: Systems". The VOB consists of at least one video object unit (VOBU) that is composed of video data and audio data. For the present invention, a VOBU additionally contains display control information and copy control information.

##### ( ii ) Video Object Unit (VOBU)

[0046] A VOBU is composed of at least one GOP

(group of pictures), and contained in a VOB. Each VOBU has a reproduction time of 0.4 to 1.0 second although a VOBU at the end of a VOB may have a reproduction time shorter than 0.4 second, depending on when the recording stops. A VOBU is a pack sequence consisting of packs arranged in a recording order. A pack at a start of a VOBU is either a Video Pack or a Control Pack, and has a system header. When one VOBU in a VOB starts with a Control Pack, every VOBU in that VOB includes a Control Pack. When one VOBU in a VOB starts with a Video Pack, no VOBUs in that VOB include a Control Pack.

##### ( iii ) Group of Pictures (GOP)

[0047] A GOP is defined in ISO/IEC 13818-2 for the MPEG standard, and refers to picture data containing at least one I (Intra) picture that is a picture which has been encoded without other pictures (frames/fields) being referred to. A GOP can be reproduced independently of other data.

##### ( iv ) Packs

[0048] A pack has a fixed size of 2KB, and can be classified as a Video Pack, an Audio Pack, or a Control Pack. Of these packs, a Control Pack is characteristic of the present invention. A Control Pack contains display control information and copy control information, and is arranged at a start of a VOBU.

#### 1. Overview of an Optical Disc Recorder/Player

[0049] An optical disc recorder/player 1 of the present invention can be used in place of a standard VTR, and is connected to a TV set 2 as shown in FIG. 1. The present optical disc recorder/player 1 encodes an AV signal contained in a TV signal (or a video signal) into compressed AV digital data that is a VOB, records the VOB onto an optical disc, and reproduces the VOB on the optical disc.

[0050] When recording a VOB onto an optical disc, the present optical disc recorder/player 1 extracts VBI data from an analog TV (video) signal, and inserts a Control Pack containing information shown by the extracted VBI data into each VOBU that constitutes the VOB.

[0051] When reproducing a video signal from the VOB recorded on the optical disc, the optical disc recorder/player 1 multiplexes the VBI data into a video signal, which it has reproduced, according to information shown in each Control Pack. This allows a display unit to control, for each VOBU, a display style, such as an aspect ratio, and a permission of the copying, while the optical disc recorder/player 1 performs reproduction.

## 2. Construction of an Optical Disc

### 2.1. Physical Construction of the Optical Disc

[0052] The present embodiment describes an optical disc, using a DVD-RAM as an example. The physical construction of the DVD-RAM is described in detail in Japanese Laid-Open Patent Application No. 8-7282 that discloses a method to record data on both lands and grooves, and in Japanese Laid-Open Patent Application No. 7-93873 that discloses Zone-CLV (constant linear velocity) and so will not be explained. The following describes a data construction unique to the present invention when it is embodied using a DVD-RAM.

### 2.2 Logical Construction of the Optical Disc

[0053] FIG. 2 shows a lead-in area, a data area, a lead-out area that are present within a region of the DVD-RAM, and an example construction of the files stored in the data area.

[0054] The lead-in area contains signals used by the optical disc recorder/player 1 to stabilize the servo controlling and identification signals to distinguish the DVD-RAM from other types of media. These signals are recorded at a start of the lead-in area (i.e., the innermost part) of the DVD-RAM. The data area is located next to the lead-in area, and stores files containing VOBs and management information. The lead-out area is present in the end of the DVD-RAM region (i.e., the outermost part of the disc), and contains signals similar to those stored in the lead-in area and other data.

[0055] At a start of the data area, volume information used for the file system is recorded. The file system is well known in the art, and so will not be described. The directories and files shown in this figure are accessed according to the file system.

[0056] In this file-directory construction, a DVD\_RTAV (Real Time Audio Visual) directory is present directly below a root directory. The DVD\_RTAV directory stores one management information file and one or more AV files that store VOBs. All the files stored in the DVD\_RTAV directory can be classified as either a management information file or an AV file.

[0057] In the example shown in the figure, VR\_MANGR.IFO is the management information file, and VR\_MOVIE.VRO, VR\_STILL.VRO, and VR\_AUDIO.VRO are AV files, with the three AV files respectively being used to record video data (which may contain audio data), still picture data, and audio data.

#### 2.2.1 AV Files

[0058] FIG. 3 shows a data construction of the VR\_MOVIE.VRO file. In VR\_MOVIE.VRO, a plurality of VOBs shown as M\_VOB#1 to M\_VOB#N are arranged. The N is a number "1" or higher, and a VOB in this VR\_MOVIE.VRO file is called "M\_VOB" to distinguish it

from Still Picture\_VOB (S\_VOB) that is a VOB for still pictures although in this specification "VOB" represents an M\_VOB unless otherwise specified.

[0059] Each M\_VOB is composed of a plurality of VOBUs.

[0060] Each VOB is a pack sequence that consists of a plurality of packs with a fixed size of 2KB. Each pack can be classified as a Control Pack (hereafter C\_PCK), a Video Pack (V\_PCK), or an Audio Pack (A\_PCK).

[0061] A C\_PCK is placed at a start of a VOB, and contains display control information such as letterbox control information, and copy control information relating to the permission of the copying by a VTR or the like, and to the copy-guard system. Here, the letterbox control information is used to control display of an image with an aspect ratio of 4:3 on a display screen with an aspect ratio of 16:9 or 14:9. The optical disc recorder/player 1 generates the display control information and the copy control information based on VBI data multiplexed into a TV (video) signal when recording the video signal, and multiplexes DCI and CCI as the VBI data into a video signal being reproduced.

[0062] A V\_PCK contains video data, and a plurality of V\_PCKs contained in one VOB correspond to a GOP (group of pictures). A GOP is divided into the payloads of a plurality of V\_PCKs contained in the VOB. While a GOP contains neither audio data nor control information, a VOB contains a C\_PCK and A\_PCKs in addition to the V\_PCKs corresponding to at least one GOP, and so different names are used to distinguish the two.

[0063] An A\_PCK contains audio data encoded according to the MPEG audio system, the Dolby AC3, the linear PCM (pulse code modulation), or the like. V\_PCKs and A\_PCKs are interleaved within each VOB.

#### 2.2.1.1. Control Pack (C\_PCK)

[0064] FIG. 4 shows a data construction of a C\_PCK. As shown in the figure, the C\_PCK is composed of a pack header (with a size of 14B (byte)), a system header (24B), and a packet (2010B). The packet is composed of a packet header (6B), a substream ID (1B), and a data area (2003B).

[0065] The pack header contains an SCR (System Clock Reference) that determines a position of the C\_PCK within a VOB.

[0066] The system header shows a boundary between different VOBs. A C\_PCK has this system header as the C\_PCK is placed at a start of a VOB.

[0067] The packet is placed into a payload of the C\_PCK, and contains a packet header, a substream ID, and a data area.

[0068] The packet header contains a stream ID "101111b" ("b" meaning a binary notation) that represents a "private stream 2" defined in the MPEG stand-

ard.

[0069] The substream ID is shown as "01010000b" indicating that the pack is a C\_PCK.

[0070] The data area contains display control information (hereafter, DCI), Copy Control Information (CCI), and DCI\_CCI\_Status information (DCI\_CCI\_SS) that shows the status of the DCI and the CCI.

#### 2.2.1.1.1 Display Control Information (DCI)

[0071] FIG. 5 shows a bit configuration of DCI in a C\_PCK in detail. As shown in the figure, the DCI shows an Aspect Ratio, a Subtitling Mode, and a Film/Camera Mode.

[0072] The Aspect Ratio is 4-bit data showing how an image should be displayed according to a letterbox controlling.

[0073] The following describes the letterbox controlling. FIG. 6 shows a relationship between a screen size and a display image size. The aspect ratio of a screen is shown as  $X : Y$ , and the aspect ratio of the display image is shown as  $X' : Y'$ . A display image with the aspect ratio of  $X' : Y' = 16 : 9$  or  $14 : 9$  is called a letterbox image. When such a letterbox image should be displayed on a screen with the aspect ratio of, for instance,  $4 : 3$ , different display methods can be used, such as displaying the letterbox image with black bars in the top and bottom parts of the screen as shown in the figure, displaying the letterbox image in a top part of the screen with a black area below, or stretching the image in the vertical direction. The letterbox control information designates such a display method, and usually shows information regarding  $X' : Y'$  and either  $Y : Z$  or  $Y : Z'$  measured from the center "O" of a display image.

[0074] The Aspect Ratio is shown as four bits (b4 to b7) and shows the following information.

0000b	: 4 : 3
0001b	: 16 : 9
1000b	: display a letterbox image with the aspect ratio of 14 : 9 in the center of the screen
0100b	: display a letterbox image with the aspect ratio of 14 : 9 in a top part of the screen
1101b	: display a letterbox image with the aspect ratio of 16 : 9 in the center of the screen.
0010b	: display a letterbox image with the aspect ratio of 16 : 9 in a top part of the screen
1011b	: display a letterbox image with the aspect ratio of 16 (or larger) : 9 in the center of the screen
0111b	: display a letterbox image with the aspect ratio of 14 : 9 on the entire screen
others	: reserved

[0075] In FIG. 5, the first two value ("0000b" and "0001b") show the aspect ratios of images, and the remaining values are used for the letterbox controlling. FIG. 6 is an example where the letterbox image with the

aspect ratio of 16 : 9 is displayed in the center of the screen.

[0076] The Subtitling Mode is shown as two bits (b3 and b2) of the DCI, and indicates the following information.

00b = No subtitles  
01b = subtitles in active image area  
10b = subtitles out of active image area  
others = reserved

[0077] For the letterbox image in FIG. 6, the active image area refers to a part on the screen where the letterbox image is displayed, and the area that is "out of active image area" is the black parts at the top or bottom of the screen. For instance, PAL (Phase Alternation by Line) uses 625 scanning lines per frame for an image with an aspect ratio of 4 : 3, with 576 lines out of the 625 lines composing the image. On the other hand, a PAL letterbox image with an aspect ratio of 16 : 9 is composed of 430 lines out of the 625 scanning lines. When the Subtitling Mode shows "subtitle in active image area" for this PAL letterbox image, a subtitle is displayed on the 430-line display image. When the Subtitling Mode shows "subtitle out of active image area", a subtitle is displayed in a part (where black is displayed) corresponding to 145 scanning lines (576 minus 430 scanning lines).

[0078] Scanning lines other than the above 576 lines correspond to a VBI.

[0079] The Film/Camera Mode is shown as one bit (b0) of the DCI, and indicates the following information.

0b : Camera Mode  
1b : Film Mode

[0080] The Film/Camera Mode is defined in PAL-plus that is a video image processing method used in Europe, and shows whether a source material of images is originally recorded by a TV camera or on a movie film.

[0081] Journal of the Institute of Television Engineers of Japan vol. 49 No. 9 (1995) describes the overview of the above display controlling based on the Aspect Ratio, the Subtitling Mode, and the Film/Camera Mode, and ETS300 294 (European Telecommunications Standards) "Television Systems 625-Line Television WSS" explains such display control in detail.

[0082] The above bit configuration of the DCI can be used for both PAL and NTSC images.

#### 2.2.1.1.2 Copy Control Information (CCI)

[0083] FIG. 7 shows a detailed bit configuration of the CCI in a C\_PCK. As shown in the figure, the CCI shows CGMS (Copy Generation Managing System), APSTB (Analog Protection System Trigger Bits), and Source.



[0084] The CGMS is shown as two bits (b7 and b6) that manage generation of copies, and is shown as one of the following values.

00b : copying is permitted without restrictions  
 01b : condition is not used  
 10b : condition is not used  
 11b : copying is prohibited

[0085] The optical disc recorder/player 1 receives a video signal into which information regarding the above CGMS has been multiplexed. If the received information shows that copying is prohibited, the optical disc recorder/player 1 cancels the recording. If the received information shows that a first-generation copy is permitted to be generated, the optical disc recorder/player 1 sets "11b" (showing that the copying is prohibited) as the CGMS, and performs the recording. If the information shows that the recording is permitted without restrictions, the optical disc recorder/player 1 sets "00b" (showing that the recording is permitted without restrictions) as CGMS, and performs the recording.

[0086] APS is a copy protection system developed by Macrovision Corporation for an analog video signal, and so is also called "Macrovision". The APSTB is shown as two bits (b5 and b4) to indicate an APS copy protection method used for a video signal inputted to the optical disc recorder/player 1. The settings of these two bits have the following meanings.

00b : APS is off  
 01b : type 1 of APS is on  
 10b : type 2 of APS is on  
 11b : type 3 of APS is on

[0087] Of the above types, type 1 is a method to disturb an AGC (automatic gain control) circuit of a VTR, and type 2 is a method that combines the above AGC disturbance method and a method to invert two colorstipes. Type 3 refers to a method that combines the above AGC disturbance method and a method to invert four colorstipes. On receiving a video signal into which information regarding the APS has been multiplexed, the optical disc recorder/player 1 sets the APSTB based on the received APS.

[0088] The Source is shown as one bit (b3) that shows whether a source material for images is an analog pre-recorded package medium as follows.

0b : analog pre-recorded package medium  
 1b : not analog pre-recorded package medium

[0089] The Source is set by a source provider, and written in VBI data of a video signal inputted to the optical disc recorder/player 1. The Source is defined in *CEI (Commission Electrotechnique Internationale) /IEC6880 1998 01 Section 3 "VBI (VBI data)".* The Source is set as "0b" (showing that a source material is

the analog pre-recorded package medium) when a video signal inputted to the optical disc recorder/player 1 was generated from a source material such as packaged software for a movie like a laserdisc pressed at a factory. Source is set as "1b" when the inputted video signal was generated based on not the analog pre-recorded package medium but, for instance, a material generated by a broadcaster.

#### 2.2.1.1.3 DCI\_CCI Status Information (DCI\_CCI\_SS)

[0090] FIG. 8 shows a bit configuration of the DCI\_CCI\_SS contained in a C\_PCK.

[0091] As shown in the figure, the DCI\_CCI\_SS shows DCI status (hereafter DCI\_SS) and CCI status (CCI\_SS).

[0092] The DCI\_SS is shown as two bits that indicate which parts of the DCI are valid as follows.

00b : entire DCI is invalid  
 01b : only Aspect Ratio of DCI is valid  
 10b : reserved (undefined)  
 11b : Aspect Ratio, Subtitling Mode, and Film/Camera Mode in DCI are valid

[0093] Note that the value of DCI\_SS may only be changed between "01b" and "11b" within a VOB.

[0094] The CCI\_SS is shown as two bits that indicate which parts of the CCI are valid as follows.

000b : entire CCI is invalid  
 001b : Source in CCI is valid  
 010b : APSTB in CCI is valid  
 011b : APSTB and Source in CCI are valid  
 100b : CGMS in CCI is valid  
 101b : CGMS and Source in CCI are valid  
 110b : CGMS and APS in CCI are valid  
 111b : CGMS, APSTB, and Source in CCI are valid  
 Note : When either DCI\_SS or CCI\_SS is set to non-zero value, at least one of DCI and CCI is in valid state.

#### 2.2.2 Management Information File (VR\_MANGR.IFO)

[0095] FIG. 9A shows a data construction of a VR\_MANGR.IFO file shown in FIG. 2 at different levels.

[0096] As shown in the figure, the VR\_MANGR.IFO is also referred to as RTR\_VMG\* (Real Time Recording Video Manager), and contains the following seven tables and information: RTR\_VMG (RTR\_VMG Information); an M\_AVFIT (Movie AV File Information Table); an S\_AVFIT (Still Picture AV File Information Table); ORG\_PGC (Original Program Chain Information); a UD\_PGCIT (User Defined PGC Information Table); TXTDT\_MG (Test Data Manager); and an MNFIT (Manufacturer's Information Table).

[0097] The following focuses on the parts related to the "V\_ATR" (Video Attribute) information that is a char-



acteristic of the present invention.

**[0098]** The M\_AVFIT stores management information for the VR\_MOVIE.VRO (AV file for video data), and contains M\_AVFITI (Movie AV File Information Table Information), M\_AVFI (Movie AV File Information), and at least one set of M\_VOB\_STI (Movie VOB Stream Information) like M\_VOB\_STI#1 ~ M\_VOB\_STI#n, with n being either the number of VOBs in the VR\_MOVIE.VRO file or a number smaller than this number of VOBs.

**[0099]** This number "n" becomes smaller than the number of VOBs when a single set of M\_VOB\_STI is shared by a plurality of VOBs. This is to say, a single piece of M\_VOB\_STI can correspond to either one VOB or a plurality of VOBs. This correspondence between a VOB and a piece of M\_VOB\_STI is shown by "M\_VOB\_STIN" (M\_VOB\_STI number) that is set in VOB information (VOBI), which is contained in the M\_AVFI and is given to each VOB. FIG. 9C shows the M\_VOB\_STIN contained in M\_AVFI. The M\_AVFI contains, for each VOB, a piece of VOBI (shown as "M\_VOBI" in the figure) that shows information on the VOB, such as a time map and M\_VOB\_GI (General Information). The M\_VOB\_GI shows a time at which a start of the VOB was recorded, an M\_VOB\_STIN, or the like.

**[0100]** Each piece of M\_VOB\_STI for one or more VOBs in the VR\_MOVIE.VRO file shows the following information relating to the VOBs: a V\_ATR (Video Attribute); an AST\_Ns (Number of Audio Streams); an SPST\_Ns (Number of Sub-Picture Streams); an A\_ATTR0 (Audio Attribute for Stream #0); an A\_ATTR1 (Audio Attribute for Stream #1); an SF\_ATR (Sub-Picture Attribute); and an SP\_PLT (Sub-Picture Color Palette).

**[0101]** The V\_ATR shows the attribute of images of a VOB in the VR\_MOVIE.VRO file. FIG. 9B shows the bit configuration of the V\_ATR. As shown in the figure, the V\_ATR is composed of a Video Compression Mode, a TV System, an Aspect Ratio, an Application Flag, a Line21\_Switch\_1, a Line21\_Switch\_2, and a Video Resolution.

**[0102]** The Video Compression Mode is shown as two bits, with "00b" indicating that the VOB has been compressed according to MPEG 1 and "01b" indicating that the VOB has been compressed according to MPEG 2.

**[0103]** The TV System is shown as two bits, with "00b" indicating 525/60 (representing the number of scanning lines per frame / the number of fields per second) for the VOB and "01b" indicating 625/50. The TV system shown by the former bit set is the NTSC system, and the latter is the PAL or SECAM (Sequential Couleur a Memoire) TV system.

**[0104]** The Aspect Ratio is shown as two bits, with "00b" indicating a ratio 4 : 3 and "01b" indicating a ratio 16 : 9 for the VOB. When this Aspect Ratio for a VOB is interpreted, the Application Flag is used to prevent a

contradiction with the Aspect Ratio for a VOB in a C\_PCK from occurring.

**[0105]** The Application Flag is two bit data and shows whether the aspect ratio shown in the V\_ATR or in a C\_PCK should be used. When the Application Flag is shown as "00b", a video stream is coded with Aspect Ratio specified in the V\_ATR. In this case, the VOB does not contain any C\_PCK, or the aspect ratio in a C\_PCK is ignored. When the Application Flag is shown as "01b", a video stream may be coded with Aspect Ratio specified in this V\_ATR, but the actual Aspect Ratio is recorded in a C\_PCK if the C\_PCK exists in the VOB. This is to say, the aspect ratio shown in each C\_PCK is used when the two aspect ratios shown in the V\_ATR and the C\_PCK are different. If no C\_PCK exists in a VOB, the aspect ratio shown in the V\_ATR is used for images of the VOB. When a single V\_ATR (a set of M\_VOB\_STI) corresponds to a plurality of VOBs and some of these VOBs have a C\_PCK while others do not, the aspect ratio shown in a C\_PCK is recognized as the aspect ratio for a VOB that contains a C\_PCK, and the aspect ratio in the V\_ATR is recognized for a VOB that contains no C\_PCK.

**[0106]** Note that when DCI\_SS is set a "01b" or "11b", the Application Flag in V\_ATR in M\_VOB\_STI specified by VOBI for this M\_VOB shall be set to "01b" and when DCI\_SS is set to "00b", Application Flag in V\_ATR in M\_VOB\_STI specified by VOBI for this M\_VOB shall be set to "00b".

**[0107]** The Line21\_Switch\_1 is shown as one bit, with "1b" indicating that the VOB contains data (which is often closed caption data) that has been multiplexed into the 21st horizontal scanning line in the first field of a frame, with "0b" indicating that the VOB contains no such data.

**[0108]** The Line21\_Switch\_2 is the same as the Line21\_Switch\_1 except that the former is provided corresponding to the second field of a frame.

**[0109]** The Video Resolution is shown as three bits that indicate the resolution of images for the VOB. For the VOB conforming to the above TV system of "525/60", when the three bits are "000b", "001b", "010b", "011b", "100b", and "101b", the resolution for the VOB is 720 × 480, 704 × 480, 352 × 480, 352 × 240, 544 × 480, and 480 × 480, respectively. For the VOB conforming to the above TV system with "625/50", when the three bits are "000b", "001b", "010b", "011b", "100b", and "101b", the resolution for the VOB is 720 × 570, 704 × 576, 352 × 576, 352 × 288, 544 × 576, and 480 × 576, respectively.

**[0110]** As the V\_ATR is contained in the VR\_MANGR.IFO file provided separately from the AV files, the optical disc recorder/player 1 can read the attribute of each VOB without reproducing the AV files. In this way, the attribute for each VOB is set in the V\_ATR, and the attribute for each VOB is set in a C\_PCK.

### 3. Construction of Optical Disc Recorder/Player 1

[0111] FIG. 10 is a block diagram showing the construction of the optical disc recorder/player 1. As shown in the figure, the optical disc recorder/player 1 comprises the following elements: a high frequency (HF) receiving unit 71; an image demodulator 72; a VBID (VBI data) demodulator 73; a buffer 81; a switch 82; a DVD recorder 75; a data transfer unit 83; and a VBI signal multiplexer 84.

[0112] The HF receiving unit 71 receives a desired TV signal via a broadcast wave.

[0113] The image demodulator 72 demodulates the TV signal received by the HF receiving unit 71, converts the demodulated TV signal into a video signal and an audio signal, and outputs them via the buffer 81 and the switch 82 to the DVD recorder 75.

[0114] The VBID demodulator 73 detects VBID contained in the video signal that has been demodulated by the image demodulator 72, generates DCI data, CCI data, and DCI\_CCI\_SS data based on the detected VBID, and outputs them to the DVD recorder 75. A time lag between the output of the video signal and the audio signal by the image demodulator 72, and the output of the DCI data, CCI data, and the DCI\_CCI\_SS data by the VBID demodulator 73 is absorbed by the buffer 81 and the switch 82 so as to have the video signal, the audio signal, the DCI data, the CCI data, and the DCI\_CCI\_SS data inputted synchronously to the DVD recorder 75.

[0115] The DVD recorder 75 receives the video signal and audio signal via the buffer 81 and the switch 82 from the image demodulator 72, compresses them as VOBs, and records the VOBs onto a DVD-RAM. When doing so, the DVD recorder 75 receives the DCI data, CCI data, DCI\_CCI\_SS data from the VBID demodulator 73, and records DCI, CCI, and DCI\_CCI\_SS for each VOBU onto the DVD-RAM. The DVD recorder 75 also codes a VOD on a DVD-RAM to obtain an analog AV signal which it outputs to the VBI signal multiplexer 84. While outputting this analog signal, the DVD recorder 75 extracts DCI and CCI from VOBUs, and outputs them to the VBI signal multiplexer 84.

[0116] The VBI signal multiplexer 84 receives the analog video signal, the DCI, and the CCI from the DVD recorder 75, and multiplexes VBID that is based on the received DCI and CCI into the analog video signal during a VBI.

[0117] The data transfer unit 83 receives a digital AV signal that has been decoded by the DVD recorder 75, and outputs it to a device, such as a PC (personal computer). The data transfer unit 83 determines whether to perform the outputting based on the CCI that has been inputted from the DVD recorder 75.

#### 3.1 VBID Demodulator

[0118] FIG. 11 is a block diagram showing the

detailed construction of the VBID demodulator 73, which comprises the following elements: a VBID detecting unit 731, a DCI generating unit 732, an MV (Macrovision) detecting unit 733, and a CCI generating unit 734.

[0119] The VBID detecting unit 731 receives an analog video signal from the image demodulator 72, and detects VBID contained in each field of the analog video signal. The following explanation assumes that 20-bit VBID is multiplexed into the 20th and 278th horizontal scanning lines of an NTSC analog video signal and that 13-bit VBID is multiplexed into the 23rd horizontal scanning line of a PALplus analog video signal. The above 20-bit VBID contains the following bits: two bits (b1 and b2) showing Aspect Ratio or letterbox control information; two bits (b7 and b8) showing CGMS; two bits (b9 and b10) showing APSTB; and one bit (b11) showing whether a source medium for an image for the field is the analog pre-recorded medium. On the other hand, the above 13-bit VBID contains the following bits: four bits (b0 to b3) showing Aspect Ratio or letterbox control information; one bit (b4) showing the Film/Camera Mode; and two bits (b9 and b10) showing the Subtitling Mode. The VBID detecting unit 731 detects the above 20-bit VBID from an NTSC signal, and the 13-bit VBID from a PAL signal.

[0120] The MV detecting unit 733 detects whether Macrovision is used as a copy protection method for the analog video signal which has been inputted from the image demodulator 72.

#### 3.1.1 DCI Generating Unit

[0121] The DCI generating unit 732 includes a one-byte internal DCI register and a two-bit internal DCI\_SS register. After generating data for DCI and DCI\_SS based on the detected VBID, the DCI generating unit 732 sets the DCI data and DCI\_SS data in the above two registers, which then output the stored data to the DVD recorder 75.

[0122] FIG. 12 is a flowchart showing the detailed processing by the DCI generating unit 732 to generate the DCI data and DCI\_SS data. The DCI generating unit 732 judges whether the VBID detecting unit 731 has detected VBID (step 121). If VBID has been detected and the current analog video signal is an NTSC signal (step 122), the DCI generating unit 732 sets "01b" in the DCI\_SS register (step 123). This is because the NTSC signal contains VBID of which only the Aspect Ratio can be set as valid DCI.

[0123] Following this, the DCI generating unit 732 converts the two bits (b1 and b2) of the 20-bit VBID, which has been detected by the VBID detecting unit 731, according to a conversion table shown in FIG. 13. As a result, the two bits are converted into four bits. The DCI generating unit 732 then sets the four bits in b4-b7 of the DCI register as the Aspect Ratio, and "0" in the remaining bits of the DCI register as the Subtitling Mode

and the Film/Camera Mode (Step 124). The DCI generating unit 732 sets "00b" in the DCI\_SS register if the above two bits (b1 and b2) are "11b".

[0124] On the other hand, when judging in step 122 that the analog video signal is a PAL signal, the DCI generating unit 732 sets "11b" in the DCI\_SS register (step 125) because the PAL signal contains VBI of which the Aspect Ratio, the Subtitling Mode, and the Film/Camera Mode can be set as valid DCI.

[0125] Following this, the DCI generating unit 732 converts four bits (b0 to b3 for the Aspect Ratio), two bits (b9 and b10 for the Subtitling Mode), and one bit (b4 for the Film/Camera Mode) of the 13-bit VBI, according to conversion tables shown in FIGs. 14-16. The DCI generating unit 732 then sets the converted bits in the DCI register as the Aspect Ratio, the Subtitling Mode, and the Film/Camera Mode (step 126).

[0126] When the VBI detecting unit 731 has not detected any VBI (step S121), the DCI generating unit 732 sets "0" in all the bits of the DCI register and the DCI\_SS register (step 127).

[0127] After setting data in the DCI register and the DCI\_SS register in this way, the DCI generating unit 732 outputs all the data to the DVD recorder 75.

### 3.1.2 CCI Generating Unit

[0128] The CCI generating unit 734 includes a one-byte internal CCI register and a three-bit internal CCI\_SS register, and generates CCI data and CCI\_SS data based on the VBI that has been detected by the VBI detecting unit 731 and on a detection result generated by the MV detecting unit 733. The CCI generating unit 734 then sets the generated CCI data and CCI\_SS data in the above two registers, and outputs the data in the registers to the DVD recorder 75.

[0129] FIG. 17 is a flowchart showing the detailed processing by the CCI generating unit 734 to generate the CCI data and CCI\_SS data. On judging that an analog video signal inputted from the image demodulator 72 is an NTSC signal and that the VBI detecting unit 731 has detected the VBI (step 171), the CCI generating unit 734 sets "11b" in the CCI\_SS register (step 172). These bits can be updated through the following processing. When judging that two bits (b7 and b8) of the 20-bit VBI that has been detected by the VBI detecting unit 731 are "11b" (indicating that copying is prohibited) (step S173), the CCI generating unit 734 outputs a recording stop signal to the switch 82 and the DVD recorder 75 (step 174) so that the switch 82 becomes OFF and the analog video signal is not outputted to the DVD recorder 75. As a result, the DVD recorder 75 stops the processing that records data for the DVD-RAM. Thereafter, when receiving VBI that does not prohibit copying, the CCI generating unit 734 clears the recording prohibition, clears the stored data in the buffer 81, sets the switch 82 on, and resumes the recording processing.

[0130] After giving the "NO" judgement in step S173, the CCI generating unit 734 further judges if the above two bits (b7 and b8) of the 20-bit VBI are "01b" (indicating that the CGMS is undefined) (step S175). If so, the CCI generating unit 734 sets "011b" in the CCI\_SS register (step 176). When the MV detecting unit 733 has judged that Macrovision is not used for the video signal (step 177), the CCI generating unit 734 changes the bit (b2) in the CCI\_SS register to "0" (step S178).

[0131] After this, the CCI generating unit 734 converts sets of bits (b7-b8, b9-b10, and b11) into the CGMS, the APSTB, and the Source using conversion tables shown in FIGs. 18-20 (step S179), and sets them in the CCI register.

[0132] On the other hand, when the video signal from the image demodulator 72 is not an NTSC signal and the VBI detecting unit 731 has not detected any VBI from the signal (step S171), the CCI generating unit 734 sets "0" in all the bits of the CCI register and the CCI\_SS register (step 180) since no CCI information exists for the video signal.

[0133] After performing the above operations for a field of the video signal sent by the image demodulator 72, the CCI generating unit 734 and the DCI generating unit 732 output the data stored in the CCI register, the DCI register, the CCI\_SS register, and the DCI\_SS register to the DVD recorder 75. Hereafter, data outputted from the CCI register and DCI register are called CCI data and DCI data, respectively, and data outputted from the DCI\_SS register and the CCI\_SS register are collectively called DCI, CCI, SS data.

### 3.2 DVD Recorder

[0134] FIG. 21 is a block diagram showing the detailed construction of the DVD recorder 75, which includes the following elements: a user interface (U/I) unit 1401; a system controlling unit 1402; an A/V signal inputting unit 1403; an encoding unit 1404; an outputting unit 1405; a decoding unit 1406; a track buffer 1407; a drive 1408; and a control information inputting unit 1409.

[0135] The U/I unit 1401 includes an operation panel and a remote control signal photoreceiver, and receives a user operation via the operation panel and a remote control signal via the photoreceiver from a remote controller as shown in FIG. 1.

[0136] The system controlling unit 1402 receives an instruction from the U/I unit 1401 such as a recording start instruction, a recording end instruction, a playback start instruction, or a playback end instruction, and controls the overall processing in accordance with the received instruction. When the recording is performed, the system controlling unit 1402 receives the DCI data, CCI data, and the DCI\_CCI\_SS data (hereafter these three sets of data are collectively called "control information data") that corresponds to one field from the

control information inputting unit 1409, and determines contents of control information that should be inserted into a C\_PCK at a start of a VOB, and outputs the control information to the encoding unit 1404. This is to say, the system controlling unit 1402 receives the control information data that corresponds to at least one field (i.e., 1/60 or 1/50 second), and outputs control information corresponding to a VOB (i.e., 0.4-1.0 second) to the encoding unit 1404. A field that corresponds to VBID whose content is different from VBID of a preceding field is not necessarily located at a start of a VOB. The system controlling unit 1402 detects changes in the control information data, which is inputted for each field, during a predetermined period for which fields in front of and behind fields corresponding to a start of a current VOB are inputted, and has the most suitable control information inserted at the start of the current VOB.

[0137] The A/V signal inputting unit 1403 receives a video signal and an audio signal via the buffer 81 and the switch 82 from the image demodulator 72, and outputs them to the encoding unit 1404.

[0138] The encoding unit 1404 generates a V\_PCK and an A\_PCK by compressing the video signal and audio signal inputted from the A/V signal inputting unit 1403, and generates a C\_PCK based on the control information inputted from the system controlling unit 1402. The encoding unit 1404 then generates a VOB made up of VOBs that each have a C\_PCK at a start. The above operations are performed under the control of the system controlling unit 1402.

[0139] The track buffer 1407 temporarily stores a VOB generated by the encoding unit 1404 when recording is to be performed, and stores a VOB read from the DVD-RAM when playback is to be performed.

[0140] When a DVD-RAM is loaded and playback or recording is performed, the drive 1408 performs the servo control and the roll control when the recording or the playing is performed. The drive 1403 writes a VOB stored in the track buffer 1407 onto the DVD-RAM via an optical pickup, and reads a VOB from the DVD-RAM into the track buffer 1407 via the optical pickup. In reality, however, a write onto and a read from the DVD-RAM are performed in a unit of an ECC (Error Correcting Code) block (i.e., sixteen sectors that are equal to 2KB  $\times$  16 packs). This is not related to the essence of the present invention and so will not be described.

[0141] The decoding unit 1406 receives a VOB that has been read from the DVD-RAM and sent from the track buffer 1407, decompresses the VOB to obtain a digital video signal and a digital audio signal. At the same time, the decoding unit 1406 extracts control information from the C\_PCK in the VOB, and outputs it via the outputting unit 1405 to the VBI signal multiplexer 84. The decoding unit 1406 performs the above operations under the control of the system controlling unit 1402.

[0142] The outputting unit 1405 converts the digital video signal and audio signal into analog forms, and outputs them to the VBI signal multiplexer 84. The out-

putting unit 1405 also receives the control information from the decoding unit 1406, and outputs it to the VBI signal multiplexer 84.

[0143] The control information inputting unit 1409 receives the control information data from the VBID demodulator 73 and outputs it to the system controlling unit 1402.

### 3.2.1. Encoding Unit

[0144] FIG. 22 is a block diagram showing the detailed construction of the encoding unit 1404 shown in FIG. 21. The encoding unit 1404 contains the following elements: a video encoder 1501; a video data buffer 1502; an audio encoder 1503; an audio data buffer 1504; a control information buffer 1505; a system time clock (STC) unit 1506; an encoder controlling unit 1507; and a system encoder 1508.

[0145] The video encoder 1501 received a video signal from the A/V signal inputting unit 1403, compresses (encodes) the video signal into MPEG2 video data, and places the MPEG2 video data into the video data buffer 1502.

[0146] The audio encoder 1503 receives an audio signal from the A/V signal inputting unit 1403, compresses (encodes) the audio signal, and places the compressed audio data into the audio data buffer 1504.

[0147] The control information buffer 1505 temporarily stores the control information inputted from the system controlling unit 1402.

[0148] The STC unit 1506 generates a clock signal (a system time clock) according to which the encoding is performed.

[0149] The encoder controlling unit 1507 controls the overall encoding operations of the encoding unit 1404. According to an encoding start instruction and an encoding end instruction from the system controlling unit 1402, the encoder controlling unit 1507 starts and ends the encoding, and informs the system controlling unit 1402 of the end of the encoding whenever one VOB has been generated. When receiving an instruction to insert control information into a start of a VOB from the system controlling unit 1402, the encoder controlling unit 1507 has the control information buffer 1505 output control information to the system encoder 1508.

[0150] The system encoder 1508 extracts compressed video data and compressed audio data that have the same size as the payload of a pack (or a packet), and control information from the video data buffer 1502, the audio data buffer 1504, and the control information buffer 1505, respectively. The system encoder 1508 then generates a C\_PCK, a V\_PCK, and an A\_PCK, produces a VOB by interleaving generated packs, and outputs the generated VOB to the track buffer 1407.

### 3.2.1.1 System Encoder

[0151] FIG. 23 is a block diagram showing the detailed construction of the system encoder 1508. As shown in the figure, the system encoder 1508 contains a virtual playback time clock unit 1601, a video packing unit 1602, virtual decoder buffers 1603 and 1605, an audio packing unit 1604, a C\_PCK packing unit 1606, and an interleaving unit 1607.

[0152] The virtual playback time clock unit 1601 generates a virtual playback time based on which time stamps, such as an SCR, a DTS (Decode Time Stamp), and a PTS (Presentation Time Stamp), are given to each pack. Here, the DTS shows a time at which the decoding unit 1406 should start decoding a pack during playback, and the PTS shows a time at which video data or audio data that has been decoded from the pack should be presented to the user when playback is performed.

[0153] The video packing unit 1602 extracts compressed video data from the video data buffer 1502, and generates a V\_PCK containing the extracted video data. When doing so, time stamps are set so as to avoid underflows and overflows in the virtual decoder buffer 1603.

[0154] The virtual decoder buffer 1603 is a virtual buffer used in simulation of how much video data will accumulate in a buffer used as a temporary storage during playback.

[0155] The audio packing unit 1604 extracts compressed audio data from the audio data buffer 1504, and generates an A\_PCK containing the extracted audio data. When doing so, time stamps are set so as to avoid underflows and overflows in the virtual decoder buffer 1605.

[0156] The virtual decoder buffer 1605 is a virtual buffer used in simulation of how much audio data will accumulate in a buffer used as a temporary storage during playback.

[0157] The C\_PCK packing unit 1606 generates a C\_PCK as shown in FIG. 4 for each VOB using control information (i.e., DCI, CCI, and DCI\_CCI\_SS) inputted from the control information buffer 1505, and assigns the C\_PCK an SCR with the lowest value of all the packs that will make up the VOB.

[0158] The interleaving unit 1607 extracts packs one by one in ascending order of SCR out of the packs that have been generated by the C\_PCK packing unit 1606, the video packing unit 1602, and the audio packing unit 1604, produces a pack sequence, that is, a VOB by arranging the above packs in order of the above extraction, and outputs the generated VOB to the track buffer 1407. Note that a C\_PCK is given an SCR with the lowest value of all the packs that make up a VOB. As a result, a C\_PCK is always placed at a start of a VOB.

### 3.2.1.2 Encoding Control Flow

[0159] FIG. 24 is a flowchart showing the encoding control by the system controlling unit 1409 shown in FIG. 21.

[0160] The system controlling unit 1402 receives, from the U/I unit 1401, a notification showing that the U/I unit 1401 has received a recording start instruction (step S241). The system controlling unit 1402 then judges if it has received valid control information from the controlling information inputting unit 1409 (i.e., the unit 1402 judges if all the bits of at least one of the DCI\_SS data and the CCI\_SS data are not "0") (step S242). If so, the system controlling unit 1402 examines how the received control information data for a plurality of fields to be contained in VOB changes, determines the content of control information suited to be placed at a start of the VOB, and writes the control information into the control information buffer 1505 (step S243). For instance, when there is no change in control information data for five fields that proceed a picture (i.e., field) to be placed at a start of the VOB, the system controlling unit 1402 writes this control information data as control information into the control information buffer 1505.

[0161] Note that in this step S243 the system controlling unit 1402 may simply write control information for fields that correspond to a start of a VOB into the control information buffer 1505 without examining the changes in the control information. This can reduce the operation load of the system controlling unit 1402.

[0162] The encoding unit 1404 places a C\_PCK that contains this control information at a start of the VOB.

[0163] The system controlling unit 1402 instructs the encoding unit 1404 (the encoder controlling unit 1507 to be exact) to start the encoding (step S244), and at the same time controls the drive 1408 to have it record the result of the encoding onto the DVD-RAM.

[0164] Following this, the system controlling unit 1402 judges if it has received from the encoder controlling unit 1507 a notification showing that the encoding has been completed for a VOB (step S245), and further judges if it has received from the U/I unit 1401 a notification showing that the U/I unit 1401 has received a recording end instruction (step S246).

[0165] When the encoding for the VOB has been completed (step S245), the system controlling unit 1402 controls to start the encoding for the next VOB by performing the operations from steps S242-S244. As a result, the next VOB containing a C\_PCK at a start of the VOB is generated.

[0166] If a recording end instruction has been received (step S246), the system controlling unit 1402 instructs the encoding unit 1404 to stop the encoding, and generates M\_VOB\_STI for VOBs that have been recorded on the DVD-RAM (step S247). In generating the M\_VOB\_STI, the system controlling unit 1402 sets the Application Flag in the M\_VOB\_STI as "01b" (show-

ing that images of the current VOB have the aspect ratio shown in each C\_PCK) if the Aspect Ratio shown in a plurality of C\_PCKs contained in the current VOB changes. When the aspect ratio remains the same within the VOB, the system controlling unit 1402 sets the Application Flag as "00b" (showing that images of the current VOB have the same aspect ratio shown in the V\_ATR). When setting "00b" as the Application Flag, the system controlling unit 1402 sets an aspect ratio that has been inputted from the control inputting unit 1409 in the Aspect Ratio in the V\_ATR. When setting "01b" as the Application Flag, the system controlling unit 1409 selects a suitable aspect ratio from aspect ratios that have been inputted from the control information inputting unit 1409, and sets the selected aspect ratio as the Aspect Ratio in the V\_ATR. The "suitable" aspect ratio may be an aspect ratio used when the recording starts or an aspect ratio that has been used most frequently during the recording.

[0167] Following this, the system controlling unit 1402 updates or generates a VR\_MANGR.IFO management information file to insert the generated M\_VOB\_STI into the VR\_MANGR.IFO (step S248).

[0168] In this way, the system controlling unit 1402 generates a VOB in which a C\_PCK containing control information is placed at a start of the C\_PCK, and updates the VR\_MANGR.IFO containing a V\_ATR.

[0169] On the other hand, when the system controlling unit 1402 has judged that it has not received any valid control information data in step S242, the unit 1402 skips the processing in step S243 and performs the processing in step S244. As a result, the encoding unit 1404 generates a VOB without inserting a C\_PCK into a start of the VOB. In the present embodiment, the encoding unit 1404 does not insert a C\_PCK into any of the VOBs that make up a VOB if no C\_PCK is inserted into a VOB at the start of the VOB.

### 3.2.2 Decoding Unit

[0170] FIG. 25 is a block diagram showing the detailed construction of the decoding unit 1406 shown in FIG. 21. As shown in the figure, the decoding unit 1405 includes a demultiplexer 1702, a video buffer 1703, a video decoder 1704, a reordering buffer 1705, a switch 1706, an audio buffer 1707, an audio decoder 1708, and a control information outputting unit 1709.

[0171] When playback is to be performed, the demultiplexer 1702 receives a VOB from the tack buffer 1407, and places the payload (i.e., packet) of each pack making up the VOB into the control information outputting unit 1709, the video buffer 1703, or the audio buffer 1707 in accordance with a type of the pack.

[0172] The video decoder 1704 extracts a packet from the video buffer 1703 and decodes the extracted packet. The above extraction is performed when a DTS written in a packet stored at a start of the video buffer 1703 is equal to the STC.

[0173] The reordering buffer 1705 buffers a plurality of sets of decoded video data and is used when the plurality of sets of the video data are rearranged to change the decoding order of the video data into the displaying order for pictures.

[0174] The switch 1706 receives the decoded video data from the video decoder 1704 and the reordering buffer 1705, and outputs video data that corresponds to one picture to the outputting unit 1405 and the data transfer unit 83. This output is performed when a PTS written in a packet is equal to the STC.

[0175] The audio decoder 1708 extracts a packet from the audio buffer 1707, and decodes the extracted packet. This extraction is performed when a PTS written in a packet stored at a start of the audio buffer 1707 is equal to the STC. The audio decoder outputs the result of this decoding to the outputting unit 1405 and the data transfer unit 83 immediately after the decoding.

[0176] The control information outputting unit 1709 receives a packet of a C\_PCK from the demultiplexer 1702, and outputs control information (i.e., DCI, CCI, and DCI\_CCI\_SS) in the received packet to the outputting unit 1405 and the data transfer unit 83. Since a C\_PCK is present at a start of each VOB, the control information outputting unit 1709 outputs control information to the outputting unit 1405 whenever one VOB has been decoded.

[0177] This control information is outputted via the outputting unit 1405 to the VBI signal multiplexer 84. On receiving the control information and an analog video signal from the outputting unit 1405, the VBI signal multiplexer 84 multiplexes VBID into the analog video signal during a VBI based on the control information. More specifically, the VBI signal multiplexer 84 receives the control information corresponding to one VOB, and holds the control information until it receives the next control information. The VBI signal multiplexer 84 multiplexes VBID during the VBIs of all the fields based on this held control information.

[0178] As has been described, the optical disc recorder/player 1 of the above embodiment inserts, as a C\_PCK, display control information and copy control information that have been multiplexed during VBIs into VOBs when converting a television (or video) signal to record it onto the present optical disc. As a result, the present optical disc recorder/player can control, for each VOB, the recording onto and the playing from the optical disc using the display control information and copy control information. To generate such VOBs, the system controlling unit 1402 merely needs to output control information to the encoding unit 1404 whenever the system controlling unit 1402 has been notified by the encoding unit 1404 that the encoding for one VOB has been completed, and the encoding unit 1404 merely needs to insert one C\_PCK into a start of each VOB. As this operation to insert a C\_PCK is simple, the operation load of the encoding unit 1404 is very small.



**[0179]** Aspect Ratio set in DCI of control information is used by the optical disc recorder/player 1 as follows. When recording, for instance, a movie program with an aspect ratio of 16 : 9 together with commercials with an aspect ratio of 4 : 3 which are broadcasted at intervals of the movie, the optical disc recorder/player 1 sets "16 : 9" as the Aspect Ratio shown in DCI of a C\_PCK in each VOB that correspond to the movie, and "4 : 3" as the Aspect Ratio in a C\_PCK of each VOB that correspond to the commercials. In this way, the aspect ratio for each VOB is recorded. When reproducing this movie, the optical disc recorder/player 1 has the VBI signal multiplexer 84 multiplex VBI containing these aspect ratios into a video signal.

**[0180]** The letterbox control information set in the Aspect Ratio is used by the optical disc recorder/player 1 as follows. When recording a movie given the letterbox control information showing that images for the movie have an aspect ratio of 16 : 9 and should be displayed in a top part of the screen, together with commercials given the letterbox control information showing that the commercials have an aspect ratio of 16 : 9 and should be displayed in the center of the screen, for instance, the optical disc recorder/player 1 inserts suitable letterbox control information into a C\_PCK of each VOB based on VBI data. As a result, the letterbox controlling changes when the content of the program is switched from the movie to a commercial or vice versa. When reproducing these recorded programs, the optical disc recorder/player 1 has the VBI signal multiplexer 84 multiplex VBI containing the letterbox control information into a video signal. Accordingly, letterbox control information for each VOB can be effectively used even after programs are recorded on the optical disc.

**[0181]** Subtitling Mode set in DCI of the control information is used by the optical disc recorder/player 1 as follows. When consecutively recording, for instance, programs A to C that have subtitling modes showing that subtitles should be displayed in active image area, that no subtitles should be displayed, and that subtitles should be displayed out of active image area, respectively the optical disc recorder/player 1 records the programs A to C as one VOB, in which VOBs corresponding to each program have a C\_PCK containing the Subtitling Mode appropriate for the program. Accordingly, Subtitling Mode can be effectively used for each program even after the program is recorded on the optical disc.

**[0182]** Film/Camera Mode set in DCI of the control information is used as follows. An image recorded on a film is usually composed of 24 fields per second, while an image recorded by a TV camera for NTSC is composed of 30 frames (i.e., 60 fields). When the Film Mode is set for a video signal, the number of frames for the video signal has been changed from 24 frames to 30 frames per second as a result of six frames being added to the original 24 frames.

**[0183]** Film/Camera Mode is useful when another

recording device re-encodes an analog video signal or digital video data outputted from the optical disc recorder/player 1. In more detail when the optical disc recorder/player 1 sets Film Mode and Camera Mode in each VOB that corresponds to a movie program and a commercial, respectively, and reproduces a VOB made up by the two VOBs for the commercial, the VBI signal multiplexer 84 or the data transfer unit 83 outputs an analog video signal or a digital video data. When the other recording device in the periphery of the optical disc recorder/player 1 receives this video signal or video data, it can detect whether Film Mode or Camera Mode is given to the signal or the data. The recording device therefore can distinguish the added six frames from other 24 frames when re-encoding the signal or data. This can prevent the image quality from being degraded as a result of the re-encoding. In this way, the optical disc recorder/player 1 can provide Film/Camera Mode for each VOB with other recording devices.

**[0184]** CGMS set in CCI of the control information is used as follows.

**[0185]** When VBI detected by the VBI detecting unit 731 shows prohibition of the copying, the switch 82 becomes off and the DVD recorder 75 stops the recording. As the copying can be prohibited in units of VOBs, the copyright of productions such as a program can be protected.

**[0186]** When VBI detected by the VBI detecting unit 731 shows that first-generation copies can be generated, the CCI generating unit 734 sets "copying is prohibited" in the CCI data while the DVD recorder 75 performs the recording onto the optical disc. Accordingly, the copying can be controlled for each VOB as desired by a producer or an owner of a program or the like, such as by merely allowing the first-generation copies to be generated.

**[0187]** When VBI detected by the VBI detecting unit 731 shows that the copying is permitted without restrictions, the CCI generating unit 734 sets "copying is permitted without restrictions" in the CCI data, while the DVD recorder 75 performs the recording onto the optical disc. Accordingly, the copying can be controlled for each VOB as desired by the producer or the owner of the program such as by allowing the copying limitlessly.

**[0188]** APSTB in CCI of the control information is used as follows. APS is a technique to degrade quality of images that have been recorded by an analog VTR without affecting reproduction by a TV so as to prevent the images from being recorded by the analog VTR and protect the copyright for the images. When recording an analog video signal to which APS is applied, the optical disc recorder/player 1 sets APSTB in the CCI for each VOB. When reproducing the video signal, the VBI signal multiplexer 84 apply APS to the video signal based on APSTB set in the CCI. This makes it possible to control the recording by the analog VTR for each VOB. In this way, the copyright can be protected in units of VOBs using the APS. Accordingly, the copying control



such as allowing the copying of only a start of a program or a part of a commercial can be performed.

#### 4. Modified Examples

[0189] The TV set 2 and the optical disc recorder/player 1 shown in FIG. 1 may be the same device, such as by integrating the optical disc recorder/player 1 into the TV set 2.

[0190] The above embodiment describes the optical disc recorder/player 1 of the present invention to be used in place of a standard VTR as shown in FIG. 1 although the present optical disc recorder/player may be embodied by an information processing device such as a personal computer (PC) that includes a DVD-RAM drive unit, a video capture board (or a TV tuner board), and an MPEG encoder/decoder. In this case, the VBI data multiplexer 73 and the VBI signal multiplexer 84 may be included in the video capture board or the TV tuner board, and the MPEG encoder/decoder may encode and decode a VOB containing C\_PCKs. This MPEG encoder/decoder does not have to be hardware and may be achieved by software that encodes and decodes a VOB.

[0191] The above information processing device may record and reproduce a VOB containing C\_PCKs by executing a recording program and a reproducing program. These recording and reproducing programs may be stored into a computer-readable recording medium to be executed by other similar hardware so that the optical disc recorder/player of the above embodiment can be achieved.

[0192] A C\_PCK in the above embodiment can be also called "RDI\_PCK" (Real Time Data Information Pack), and may additionally contain information such as a presentation start time of the first video field in a VOB, a recording time (duration) of the VOB, and manufacturer's information showing information such as relating to a program producer.

[0193] The optical disc recorder/player 1 of the above embodiment receives a broadcast wave and demodulates the broadcast wave to obtain a TV signal by using the HF receiving unit 71 and the image demodulator 72. The optical disc recorder/player 1 may also contain an inputting unit for receiving an analog video signal such as for S-VHS and outputting the received analog video signal to the buffer 81 and the VBI data modulator 73.

[0194] V\_ATR of the above embodiment may contain all the contents of DCI, CCI, and DCI\_CCI\_SS together with application flags that correspond to Aspect Ratio, Subtitling Mode, Film/Camera Mode, CGMS, APSTB, and Source. As a result, control information for each VOB and VOBu can be set in V\_ATR and a C\_PCK, respectively, with application flags showing whether control information in the V\_ATR or the C\_PCK should be used.

[0195] As mentioned earlier, M\_VOB\_STI that con-

tains a V\_ATR can be shared by a plurality of VOBs. In this case, the system controlling unit 1402 performs operations in step S248 in FIG. 24 as follows. The unit 1402 compares M\_VOB\_STI generated in step S247 with other M\_VOB\_STI present in the management information file to detect whether M\_VOB\_STI that has the same content as the generated M\_VOB\_STI exists. When detecting that such M\_VOB\_STI exists, the system controlling unit 1402 does not insert the generated M\_VOB\_STI into the management information file in step S248, and instead sets the number showing the M\_VOB\_STI present in the file in VOB\_I that corresponds to the current VOB that has been recorded. When M\_VOS\_STI is shared by a plurality of VOBs in this way, it becomes possible to prevent a size of the management information file from continuing to increase.

[0196] In the above embodiment, every VOBu that makes up a VOB either contains a C\_PCK or contains no C\_PCKs at all. This is desirable in that the processing by the DVD recorder 75 to generate a VOBu can be simplified and so the operation load of the DVD recorder 75 can be reduced. It is alternatively possible that a VOB is composed of VOBUs some of which contain a C\_PCK and some of which does not. In this case, control information contained in a VOBu may be used for other VOBUs that do not contain C\_PCK and that are placed behind the VOBu. This is useful in that a data size of each VOB can be reduced.

[0197] In the above embodiment, the VBI data multiplexer 73 outputs control information corresponding to each field to the DVD recorder 75. Before outputting the control information to the DVD recorder 75, the VBI data multiplexer 73 may judge whether the control information is reliable or whether the same control information has been sent for a predetermined duration, and may output it to the DVD recorder 75 only when giving the affirmative judgement.

[0198] In the above embodiment, the system controlling unit 1402 selects, out of control information inputted from the VBI data multiplexer 73, suitable control information for each VOBu. After storing control information inputted from the VBI data multiplexer 73, the VBI data multiplexer 73 may detect a point at which the content of the stored control information changes, and control the encoding unit 1404 to position the detected point in the control information at a start of a VOBu.

[0199] A value "10b" of CGMS in DCI may be used to show that "the first-generation copy may be generated" although this value of CGMS shows that "condition is not used" in the above embodiment. In the former case, when receiving a video signal recorded by a user with a video camera and recording this video signal as a video object onto a DVD-RAM, for instance, the optical disc recorder/player may set one of "copying is permitted without restrictions", "the first-generation copy may be generated", and "no more copying is permitted"

according to a user selection. The user may set "copying is permitted without restrictions" or "the first-generation copy may be generated" for CGMS when the video data (object) on the DVD-RAM is used as a master for the copying, and may set "no more copying is permitted" when the video data on the DVD-RAM is not used as a master, for instance.

[0200] In the above embodiment, a VOB is described using an M\_VOB containing V\_PCKs as an example. However, a VOB for the present invention may be an S\_VOB (Still Picture\_VOB) that contains an S\_PCK (Still Picture Pack). In this case, a control pack may be loaded into each VOB in an S\_VOB.

[0201] The above embodiment states that values other than "0000b" and "0001b" of four bits (b7-b4) in FIG. 5 are used for the letter box control. However, each of these values may additionally show an aspect ratio of, for instance, 4 : 3 or 16 : 9, for an image composed of active image area and areas out of the active image area, such as the image containing black parts in FIG. 6.

[0202] If a recording stop signal is outputted in step S174 of FIG. 17, the DVD recorder 75 may stop the recording processing, and be set in an idle state where a user operation input is awaited.

[0203] Although the present invention has been fully described by way of examples with reference to accompanying drawings, it is to be noted that various changes and modifications will be apparent to those skilled in the art. Therefore, unless such changes and modifications depart from the scope of the present invention, they should be construed as being included therein.

#### Industry Applicability

[0204] The optical disc recorder/player of the present invention records a video object unit composed of video object units onto an optical disc while recording information showing display control and copying control for each video object unit having a reproduction time of one second or shorter. When reproducing the video object from the optical disc, the optical disc recorder/player performs display control and copying control based on the recorded information. Accordingly, the present invention is suited to an optical disc recorder/player that receives a video signal, records it as a video object onto an optical disc, and reproduces the recorded video object from the optical disc.

#### **Claims**

1. A recordable optical disc on which at least one video object is recorded,  
wherein each video object contains at least one video object unit,

each video object unit contains control informa-

tion and video data, and has a presentation time of one second or shorter, and  
the control information relates to at least one of: (a) display control for the video object unit; and (b) copying control for the video object unit.

2. The recordable optical disc of Claim 1,  
wherein each video object is generated from an analog video signal, and control information indicates a content of data that is multiplexed into vertical blanking intervals in the analog video signal.
3. The recordable optical disc of Claim 1,  
wherein the control information shows at least one of: (a) a display position for the video object unit; (b) copying management conditions for the video object unit; and (c) a source-material type for the video object unit.
4. The recordable optical disc of Claim 1,  
wherein each video object unit contains one control pack and a plurality of video packs into which video data is placed and  
wherein the control pack is placed at a start of the video object unit and contains the control information.
5. The recordable optical disc of Claim 1,  
wherein the control information further contains status information showing which parts of the control information are valid.
6. The recordable optical disc of Claim 1,  
wherein the control information contains letterbox control information that shows a display position of images for the video object unit on a screen.
7. The recordable optical disc of Claim 1,  
wherein the control information shows an aspect ratio of images for the video object unit.
8. The recordable optical disc of Claim 1,  
wherein the control information contains subtitle mode information showing a display position of subtitles for the video object unit.
9. The recordable optical disc of Claim 1,  
wherein the control information contains film/camera mode information that shows whether a source material of the video object unit was recorded either by a television camera or on a movie film.
10. The recordable optical disc of Claim 1,  
wherein the control information contains information regarding Copy Generation Managing System to show whether to permit the video object

unit to be copied onto another recording medium.

11. The recordable optical disc of Claim 1,  
wherein the control information contains  
information regarding Analog Protection System  
(APS) to show a type of APS copy protection  
method used on an analog video signal based on  
which the video object unit was generated.

12. The recordable optical disc of Claim 1,  
wherein the control information contains  
source information that shows whether a source  
material of the video object unit is an analog pre-  
recorded package medium.

13. The recordable optical disc of Claim 7,  
wherein in addition to at least one video  
object that contains control information, at least one  
piece of stream information and a video object that  
contains no control information are recorded on the  
recordable optical disc,

wherein each piece of stream information is  
associated with at least one video object, and con-  
tains:

aspect information that shows an aspect ratio  
of the at least one video object associated with  
the piece of stream information; and  
an application flag that shows either: (a) that  
the video object is encoded using the aspect  
ratio in the aspect information; or (b) that the  
video object is not necessarily encoded using  
the aspect ratio in the aspect information, and  
an aspect ratio in control information in each  
video object unit is used.

14. An optical disc recorder that records a video object  
onto a recordable optical disc, comprising:

extracting means for extracting data that has  
been multiplexed into an audio-video signal,  
the data relating to at least one of: (a) display  
control; and (b) copying control;

encoding means for encoding the audio-video  
signal to generate the video object containing  
at least one video object unit that has a presen-  
tation time of one second or shorter;

generating means for generating, based on the  
extracted data, control information relating to at  
least one of: (a) display control for each video  
object unit in the video object; and (b) copying  
control for each video object unit in the video  
object; and

controlling means for having the encoding  
means to insert the generated control informa-  
tion into each video object unit.

15. The optical disc recorder of Claim 14,

wherein the extracting means extracts the  
data that is multiplexed into the audio-video signal  
during vertical blanking periods.

16. The optical disc recorder of Claim 14,  
wherein the control information shows at  
least one of: (a) a display position for the video  
object unit; (b) copying management conditions for  
the video object unit; and (c) a source-material type  
for the video object unit.

17. The optical disc recorder of Claim 14,  
wherein each video object unit contains one  
control pack, a plurality of video packs, and a plural-  
ity of audio packs into which video data, audio data,  
and control information are respectively placed and  
wherein the controlling means has the  
encoding means insert a control pack into a start of  
each video object unit.

18. The optical disc recorder of Claim 14,  
wherein the control information further con-  
tains status information showing which parts of the  
control information are valid.

19. The optical disc recorder of Claim 14,  
wherein the control information contains let-  
terbox control information that shows a display  
position of images for the video object unit on a  
screen.

20. The optical disc recorder of Claim 14,  
wherein the control information shows an  
aspect ratio of images for the video object unit.

21. The optical disc recorder of Claim 14,  
wherein the control information contains  
subtitle mode information showing a display posi-  
tion of subtitles for the video object unit.

22. The optical disc recorder of Claim 14,  
wherein the control information contains  
film/camera mode information that shows whether  
a source material of the video object unit was  
recorded either by a television camera or on a  
movie film.

23. The optical disc recorder of Claim 14,  
wherein the control information contains  
information regarding Copy Generation Managing  
System to show whether to permit the video object  
unit to be copied onto another recording medium.

24. The optical disc recorder of Claim 14,  
wherein the control information contains  
information regarding Analog Protection System  
(APS) to show a type of APS copy protection  
method used on an analog video signal based on

which the video object unit was generated.

25. The optical disc recorder of Claim 14,  
wherein the control information contains  
source information that shows whether a source  
material of the video object unit is an analog pre-  
recorded package medium. 5
26. The optical disc recorder of Claim 14,  
wherein in addition to at least one video  
object that contains control information, at least one  
piece of stream information and a video object that  
contains no control information are recorded on the  
recordable optical disc, 10  
wherein each piece of stream information is  
associated with at least one video object, and con-  
tains:  
aspect information that shows an aspect ratio  
of the at least one video object associated with  
the piece of stream information; and 20  
an application flag that shows either: (a) that  
the video object is encoded using the aspect  
ratio in the aspect information; or (b) that the  
video object is not necessarily encoded using  
the aspect ratio in the aspect information, and  
an aspect ratio in control information in each  
video object unit is used. 25
27. An optical disc player that reproduces a video  
object recorded on an optical disc, the video object  
containing at least one video object unit that each  
has a presentation time of one second or shorter,  
the optical disc player comprising: 30  
reading means for reading the video object  
from the optical disc;  
separating means for separating each video  
object unit in the read video object into video  
data, audio data, and control information; 40  
decoding means for decoding the video data  
and the audio data obtained by separating the  
video object unit to generate an audio-video  
signal corresponding to the video object unit;  
and 45  
multiplexing means for multiplexing additional  
data into the generated audio-video signal dur-  
ing vertical blanking intervals based on the  
control information that has been obtained by  
separating the video object unit. 50
28. The optical disc player of Claim 27,  
wherein control information in each VOB  
shows at least one of: (a) a display position for  
the video object unit; (b) copying management con-  
ditions for the video object unit; and (c) a source-  
material type for the video object unit. 55

29. The optical disc player of Claim 27,  
wherein each video object unit contains one  
control pack, a plurality of video packs, and a plural-  
ity of audio packs into which video data, audio data,  
and control information are respectively placed,  
wherein the control pack is located at a start  
of the video object unit,  
wherein the separating means separates the  
video object unit into a control pack, video packs,  
and audio packs, and  
wherein the multiplexing means multiplexes  
the additional data based on the control information  
contained in the control pack that has been  
obtained by separating the video object unit.
30. The optical disc player of Claim 27,  
wherein the control information additionally  
contains status information showing which parts of  
the control information are valid and  
wherein the multiplexing means multiplexes  
the additional data based on the parts that are  
shown as valid by the control information.
31. The optical disc player of Claim 27,  
wherein the control information contains let-  
terbox control information that shows a display  
position of images for the video object unit on a  
screen.
32. A recording method to record a video object con-  
taining at least one video object unit onto an optical  
disc, including:  
an extracting step for extracting data that is  
multiplexed into an audio-video signal, the data  
relating to display control and copying control;  
an encoding step for encoding the audio-video  
signal to generate video data and audio data;  
a generating step for generating control infor-  
mation that relates to display control and copy-  
ing control based on the extracted data; and  
a multiplexing step for multiplexing the control  
information, the video data, and the audio data  
that have been generated into a video object  
unit having a presentation time of one second  
or shorter.
33. A reproduction method to reproduce a video object  
recorded on an optical disc, including:  
a reading step for reading the video object from  
the optical disc, the video object containing at  
least one video object unit that each has a  
presentation time of one second or shorter;  
a separating step for separating each video  
object unit in the read video object into video  
data, audio data, and control information;  
a decoding step for decoding the video data

and the audio data obtained by separating the video object unit to generate an audio-video signal corresponding to the video object unit; and

a multiplexing step for multiplexing additional data into the generated audio-video signal during vertical blanking intervals based on the control information that has been obtained by separating the video object unit.

10

34. A program that is recorded on a computer-readable recording medium and that has a computer perform a recording operation to record a video object containing at least one video object unit onto an optical disc, the recording operation includes:

15

an extracting step for extracting data that is multiplexed into an audio-video signal, the data relating to display control and copying control; an encoding step for encoding the audio-video signal to generate video data and audio data; a generating step for generating control information that relates to display control and copying control based on the extracted data; and a multiplexing step for multiplexing the control information, the video data, and the audio data that have been generated into a video object unit having a presentation time of one second or shorter.

30

35. A program that is recorded on a computer-readable recording medium and that has a computer perform a reproducing operation to reproduce a video object recorded on an optical disc, the reproducing operation includes:

35

a reading step for reading the video object from the optical disc, the video object containing at least one video object unit that each has a presentation time of one second or shorter; a separating step for separating each video object unit in the read video object into video data, audio data, and control information; a decoding step for decoding the video data and the audio data obtained by separating the video object unit to generate an audio-video signal corresponding to the video object unit; and a multiplexing step for multiplexing additional data into the generated audio-video signal during vertical blanking intervals based on the control information that has been obtained by separating the video object unit.

55

FIG. 1

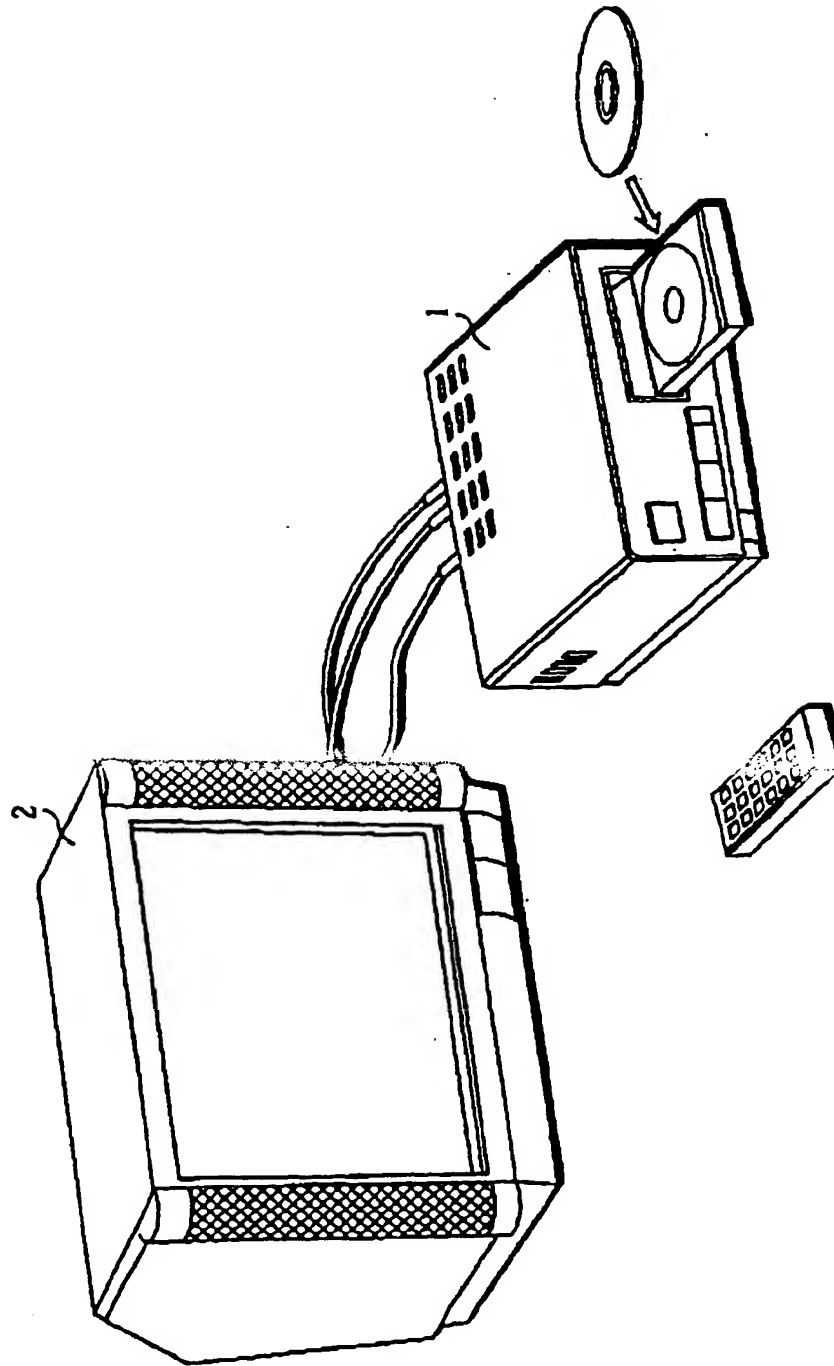


FIG. 2

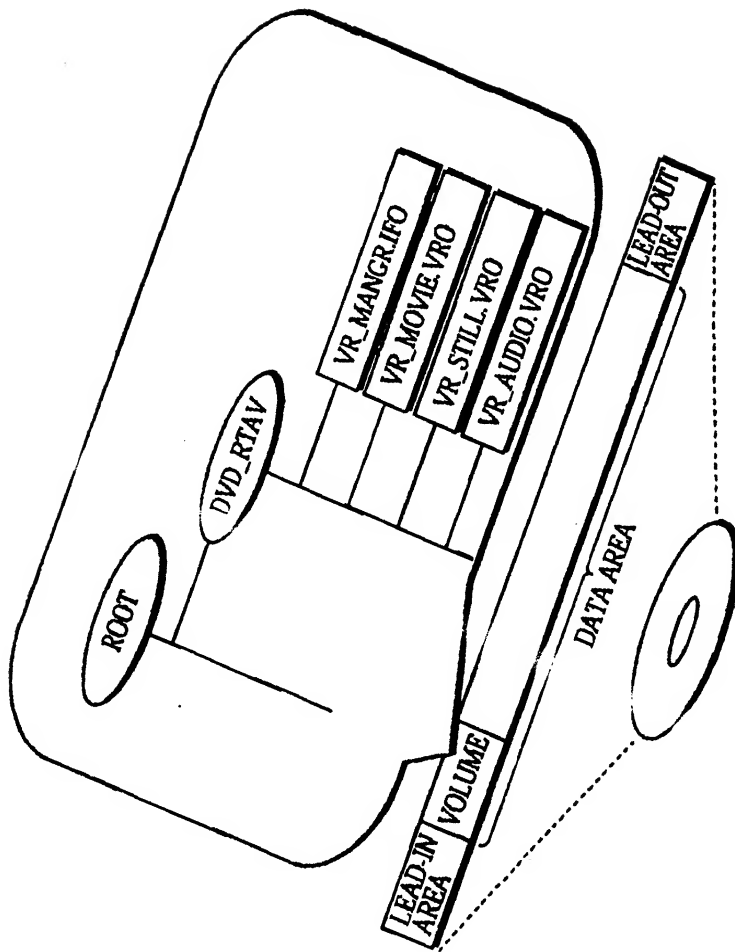




FIG. 3

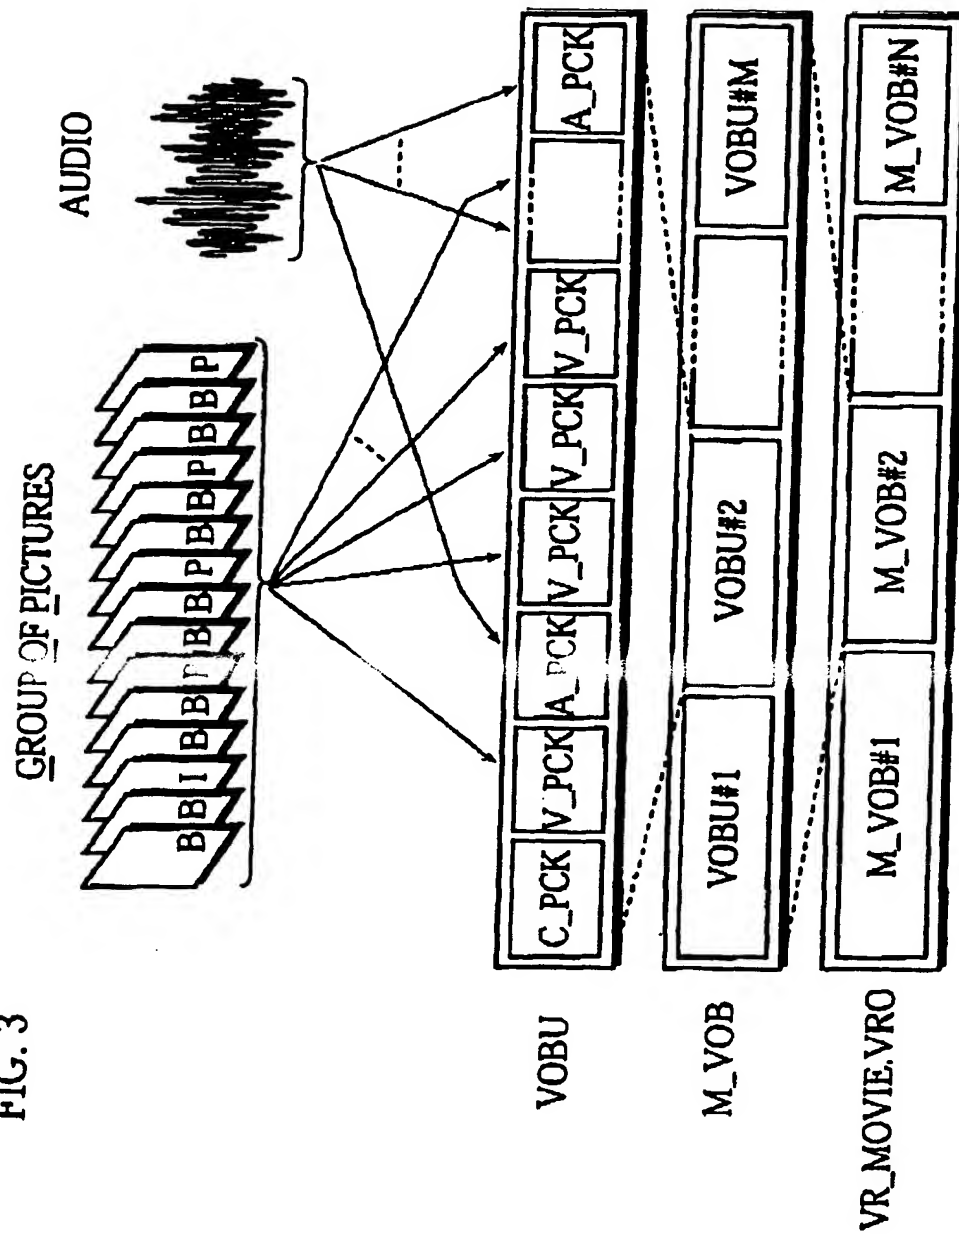


FIG. 4

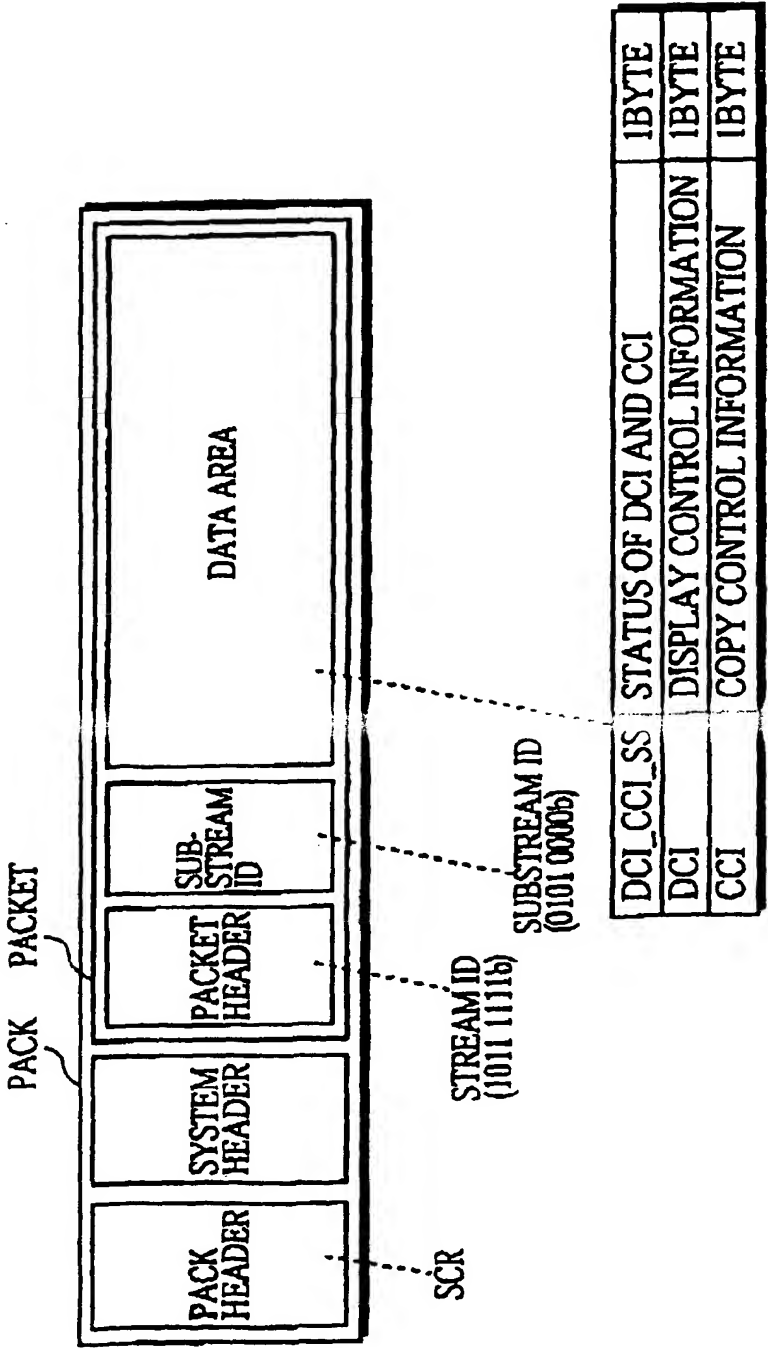
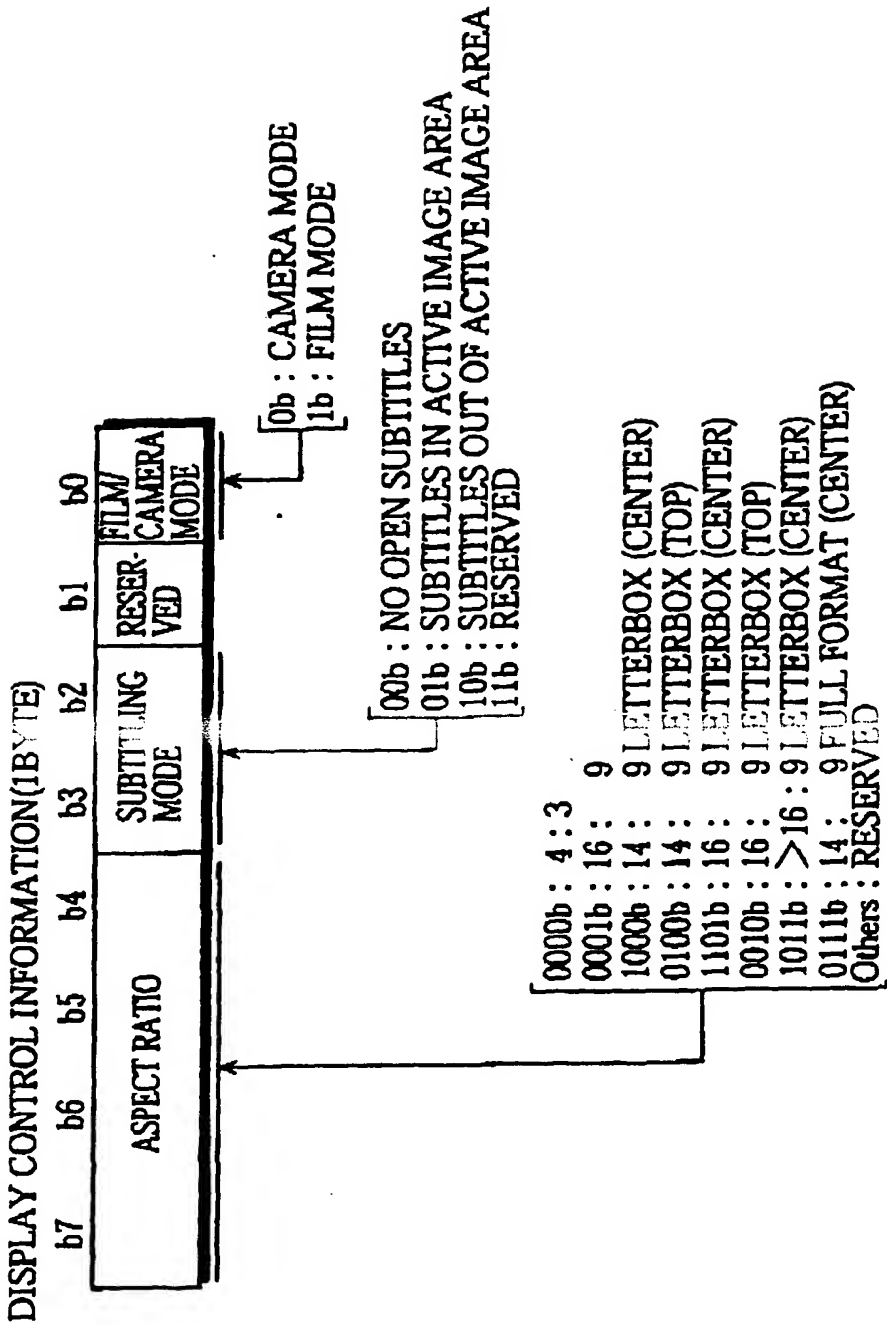


FIG. 5



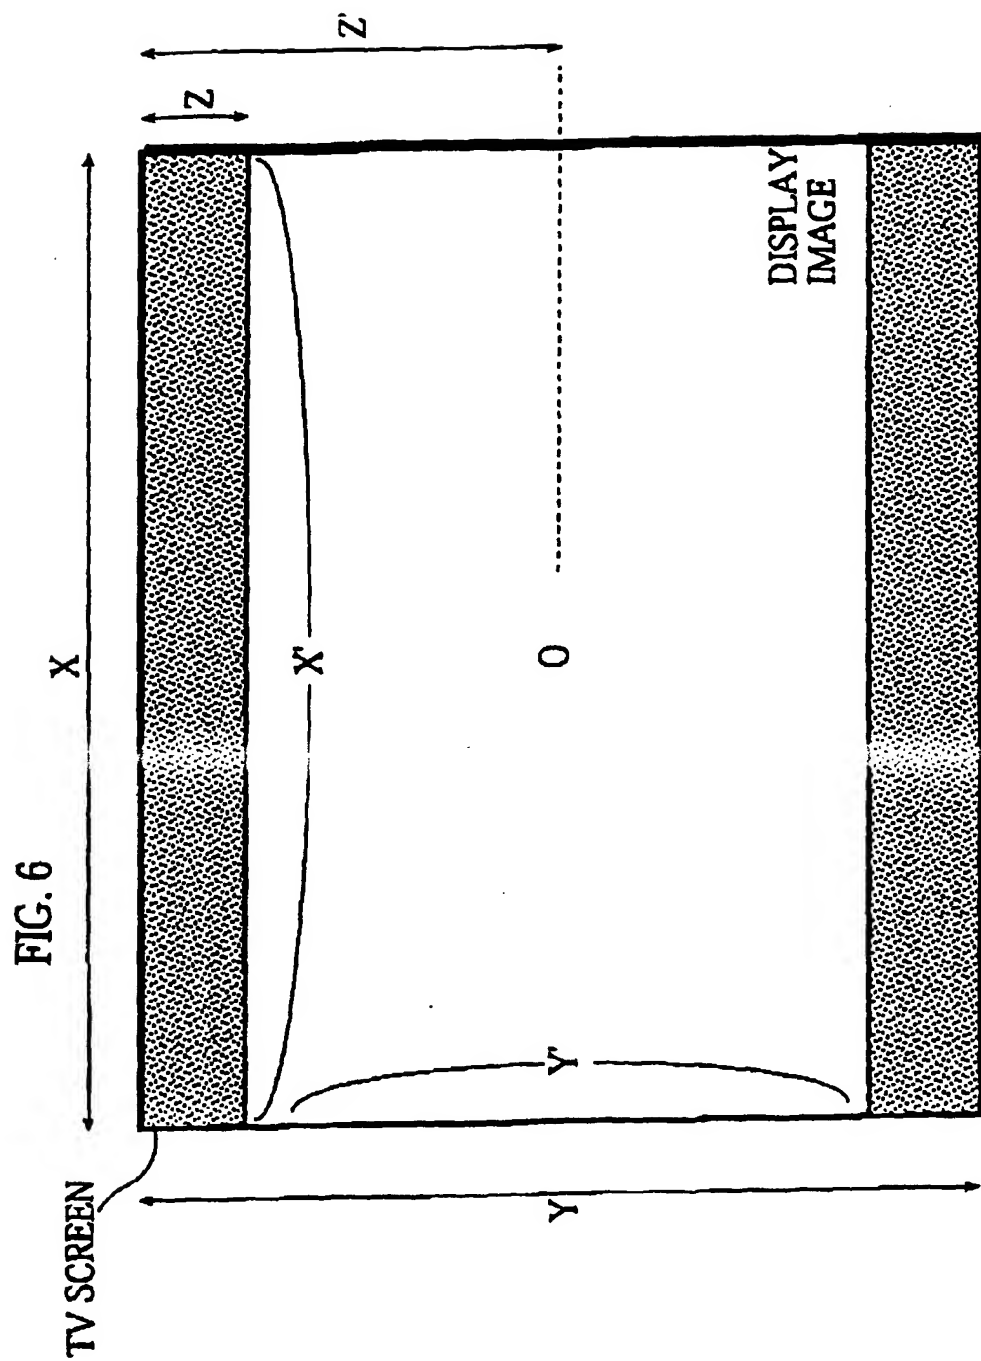


FIG. 7

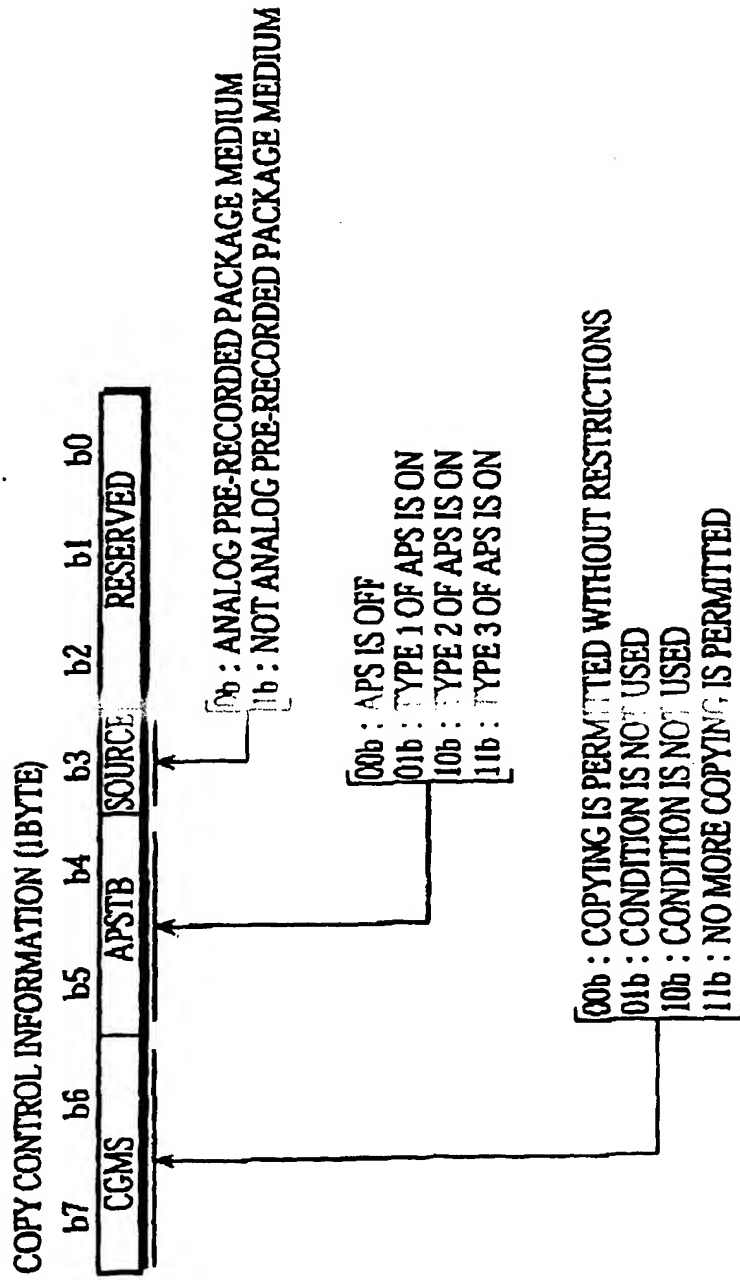


FIG. 8

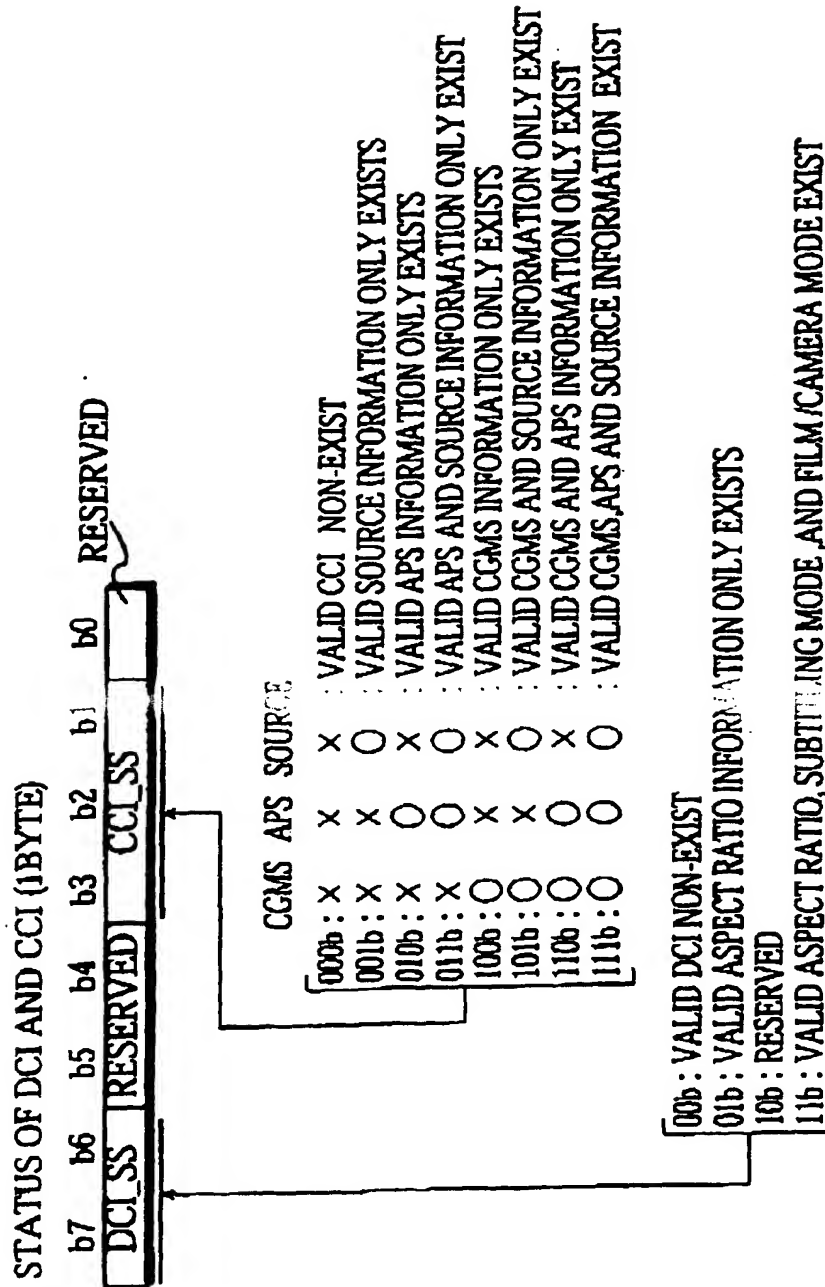


FIG. 9A

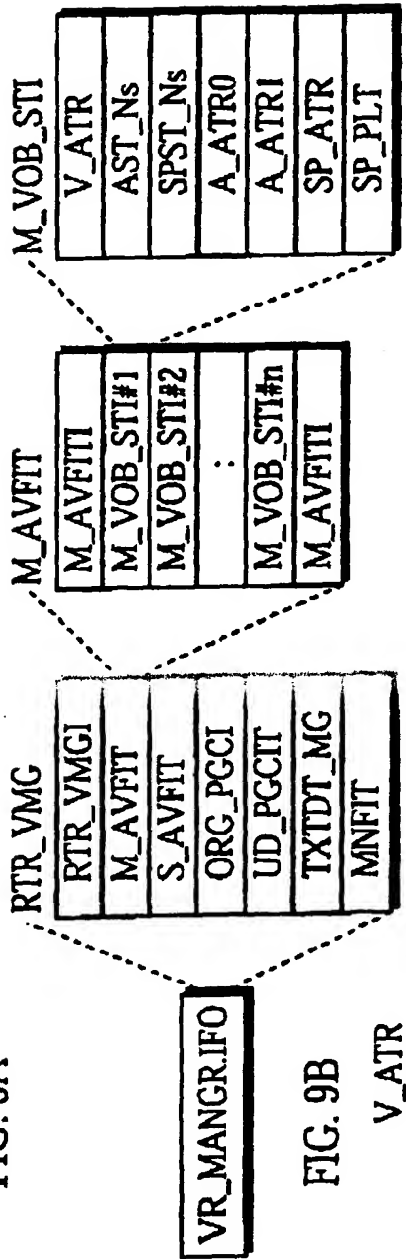


FIG. 9B

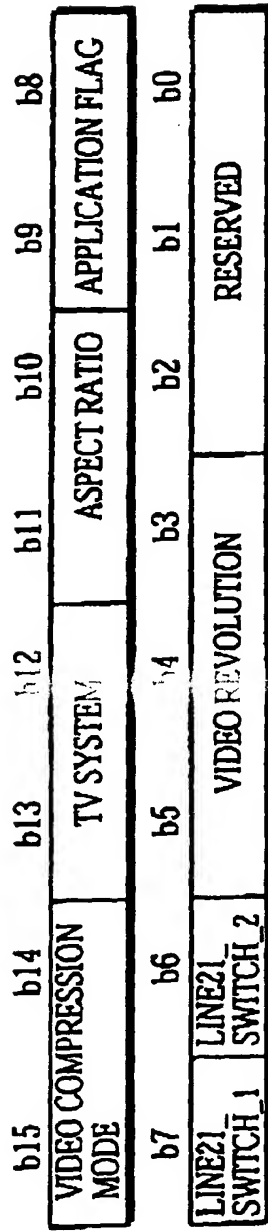
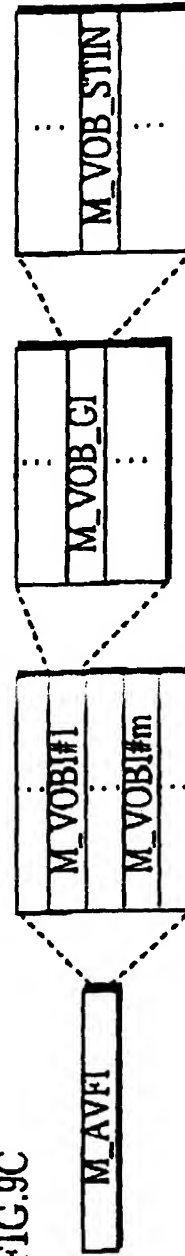


FIG. 9C





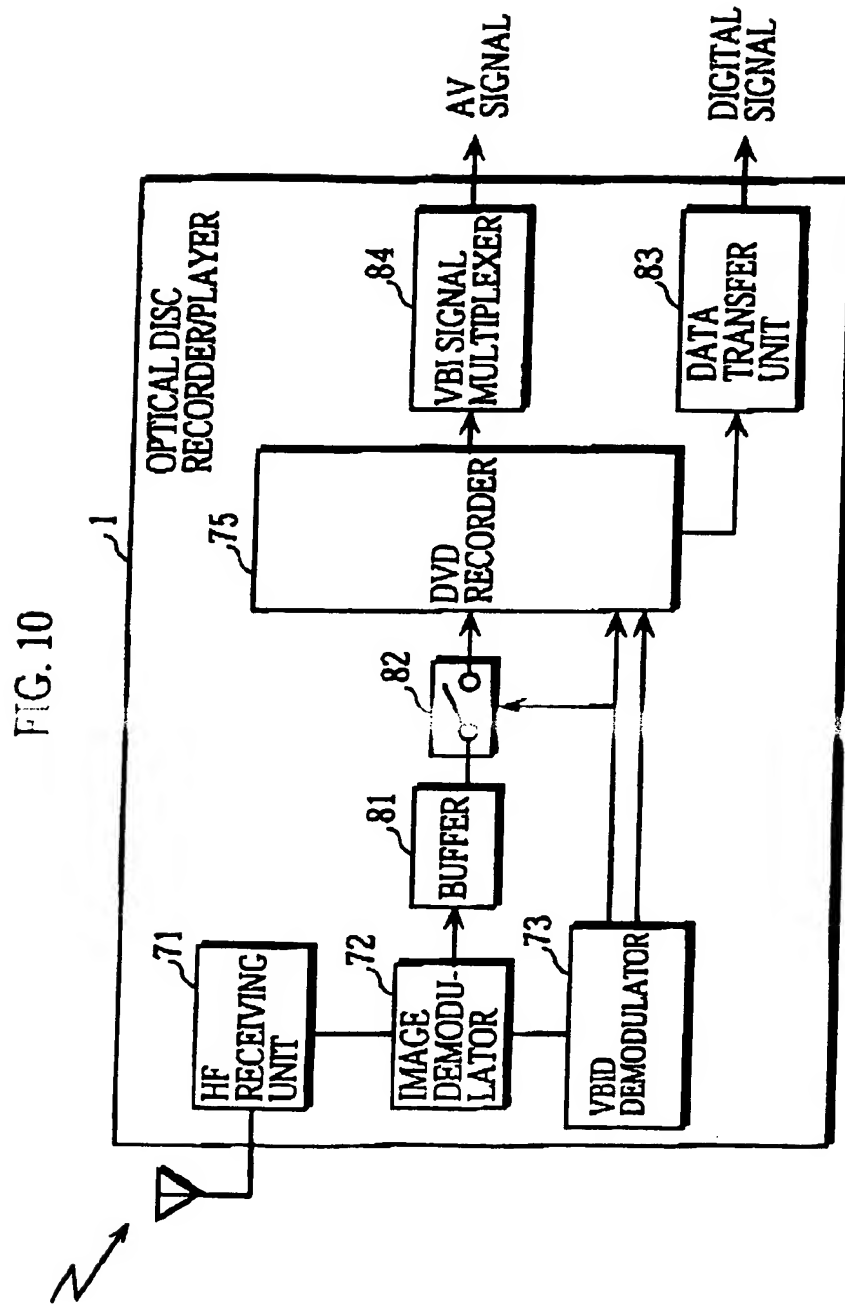
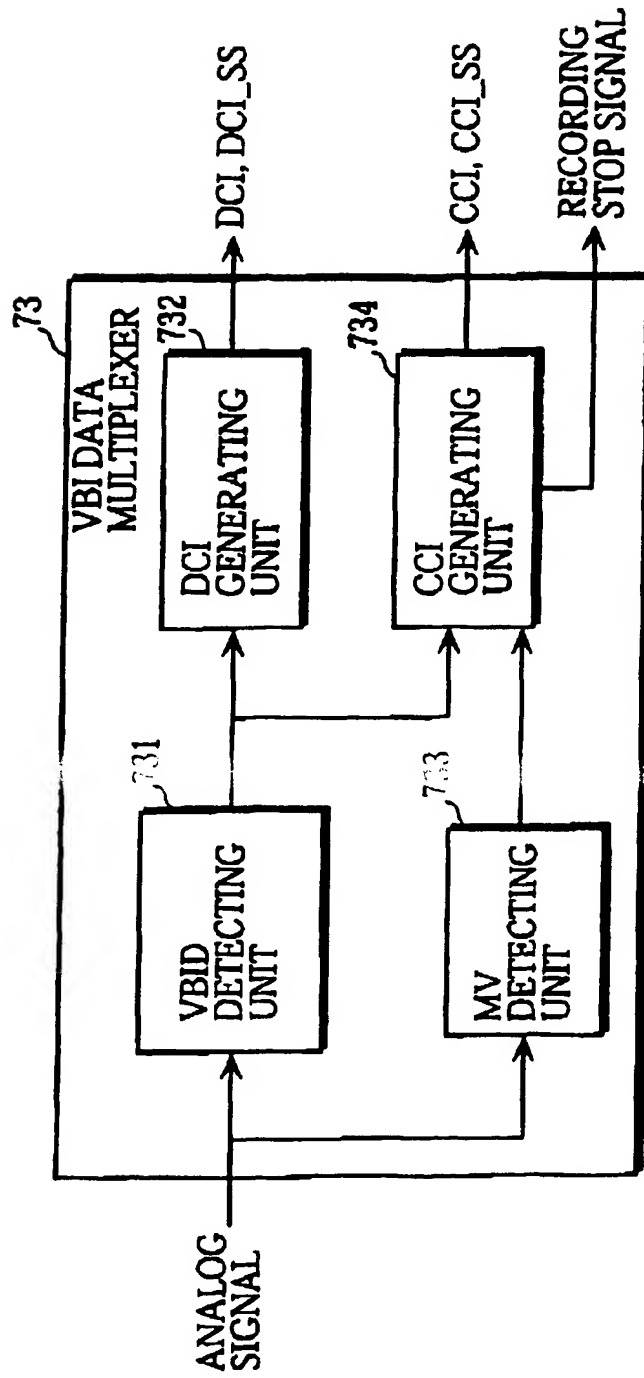


FIG. 11



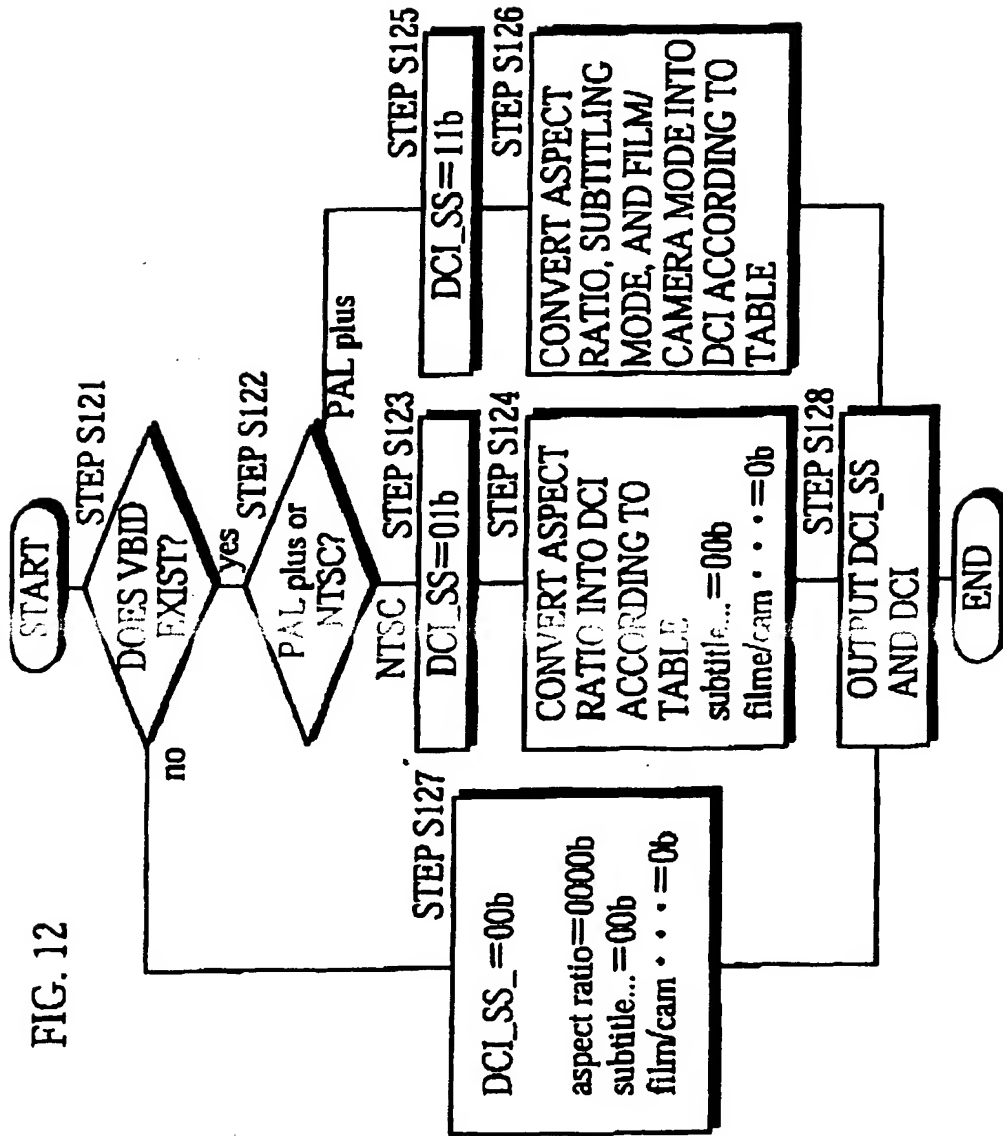


FIG. 13

NTSC "ASPECT RATIO" CONVERSION TABLE

b1	b2	MEANING	DCI(ASPECT RATIO)
0	0	4 : 3	0000b
0	1	16 : 9 LETTERBOX	1101b
1	0	16 : 9	0001b
1	1	UNDEFINED	(DCI_SS=00b)

FIG. 14

PAL plus "ASPECT RATIO" CONVERSION TABLE

b3	b2	b1	b0	MEANING	DCI(ASPECT RATIO)
1	0	0	0	4 : 3	0000b
0	0	0	1	14 : 9 LETTERBOX(CENTER)	1000b
0	0	1	0	14 : 9 LETTERBOX(TOP)	0100b
1	0	1	1	16 : 9 LETTERBOX(CENTER)	1101b
0	1	0	0	16 : 9 LETTERBOX(TOP)	0010b
1	1	0	1	>16 : 9 LETTERBOX(CENTER)	1011b
1	1	1	0	14 : 9	0111b
0	1	1	1	16 : 9	0001b

FIG. 15

"SUBTITLING MODE" CONVERSION TABLE

b9	b10	MEANING	DCI(SUBTITLE)
0	0	NO SUBTITLES	00b
0	1	SUBTITLE IN ACTIVE IMAGE AREA	01b
1	0	SUBTITLE OUT OF ACTIVE IMAGE AREA	10b
1	1	UNDEFINED	00b

FIG. 16

**"FILM/CAMERA MODE" CONVERSION TABLE**

<b>b4</b>	<b>MEANING</b>	<b>DCI(film/camera)</b>
0	CAMERA MODE	0b
1	FILM MODE	1b

FIG. 17

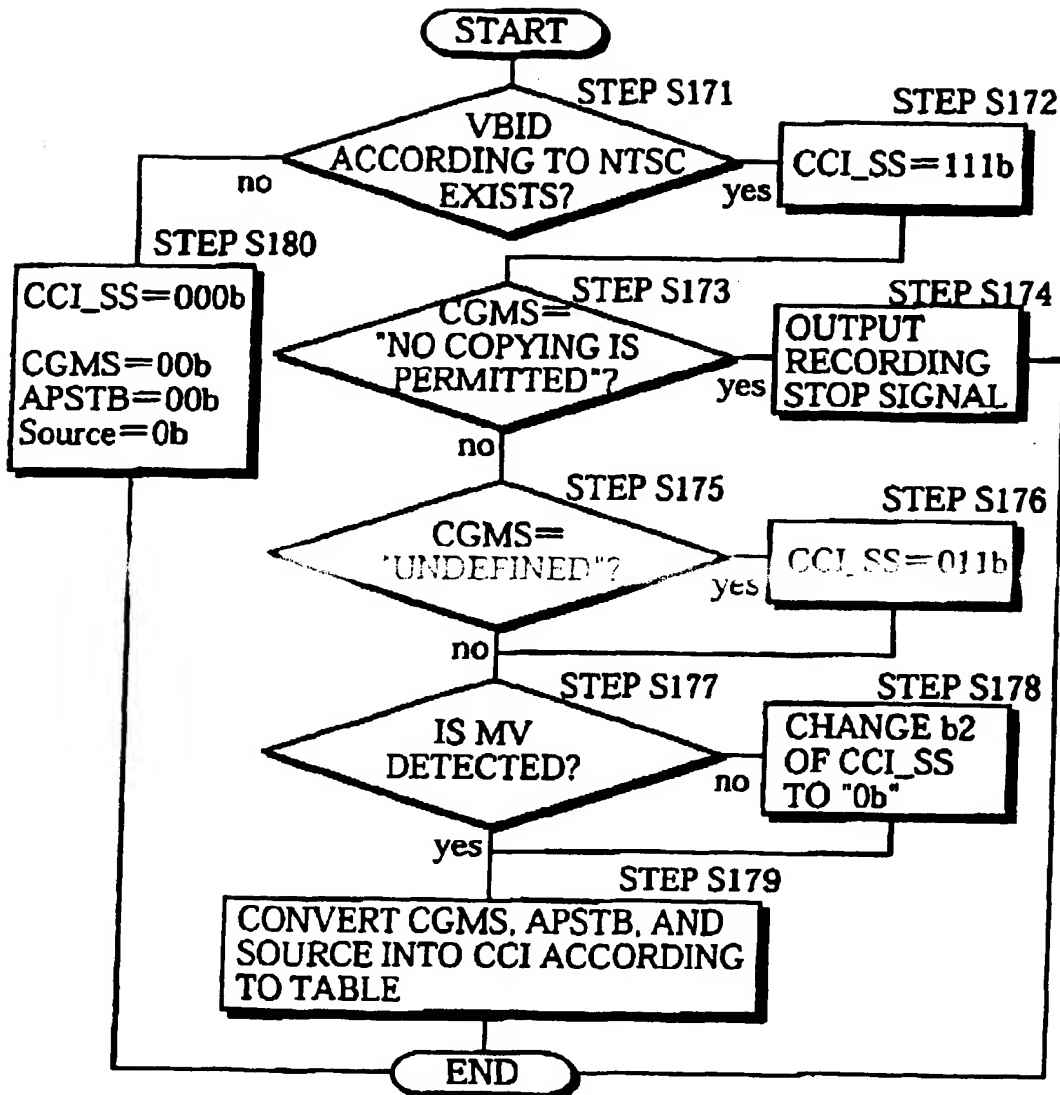




FIG. 18

"CGMS" CONVERSION TABLE

b7	b8	MEANING	CCI(CGMS)
0	0	COPY IS PERMITTED	00b
0	1	UNDEFINED	01b
1	0	FIRST-GENERATION COPY IS PERMITTED TO BE GENERATED	11b(COPYING IS PROHIBITED)
1	1	COPYING IS PROHIBITED	(RECORDING STOP INSTRUCTION OUTPUTTED)

FIG. 19

"APSTB" CONVERSION TABLE

b9	b10	MEANING	CCI(APSTB)
0	0	NEITHER AGC PULSE NOR COLORSTRIPE OPERATION	00b
0	1	AGC PULSE IS VALID, BUT NO COLORSTRIPE OPERATION	01b
1	0	VALID AGC PULSE AND COLORSTRIPE OPERATION 2L MODE	10b
1	1	VALID AGC PULSE AND COLORSTRIPE OPERATION 4L MODE	11b


FIG. 20

"SOURCE" CONVERSION TABLE

b11	MEANING	CCI(Source)
1	ANALOG PRE-RECORDED MEDIA	0b
0	OTHERS	1b

FIG. 21

Detailed description of FIG. 21: This block diagram illustrates the architecture of a DVD recorder, designated by the reference numeral 75. The recorder's internal components are enclosed in a large rectangular frame. At the top left is the UI (User Interface) block 1401, which is bidirectionally connected to the System Controlling Unit 1402. To the right of the UI is the Control Information Inputting Unit 1409, which is connected to the System Controlling Unit 1402. Below the UI is the AV Signal Inputting Unit 1403, which receives input from a VBI Signal Multiplexer 84 via a SWITCH 82. The AV Signal Inputting Unit 1403 is connected to the Encoding Unit 1404. The Encoding Unit 1404 is connected to the Track Buffer 1407. The Track Buffer 1407 is connected to the Drive 1408, which is in turn connected to a DVD-RAM. The System Controlling Unit 1402 is also connected to the Drive 1408. The Track Buffer 1407 is connected to the Decoding Unit 1406. The Decoding Unit 1406 is connected to the Outputting Unit 1405, which is connected to a VBI Multiplexer 73. A Data Transfer Unit 83 is connected to the Outputting Unit 1405 and the Decoding Unit 1406. The VBI Multiplexer 73 is connected to the VBI Signal Multiplexer 84. The DVD-RAM is connected to the Drive 1408.

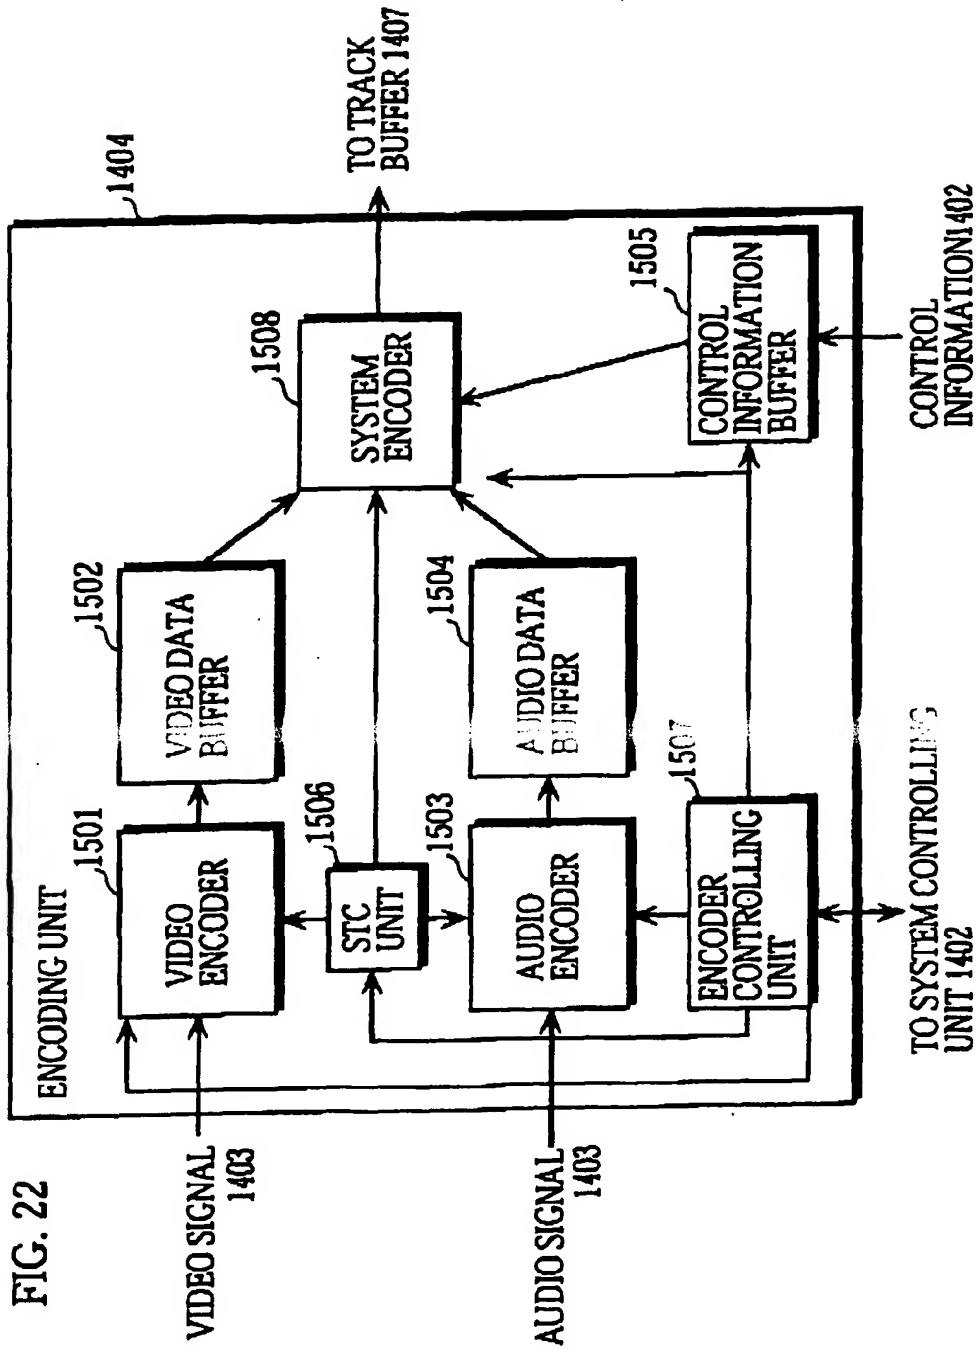



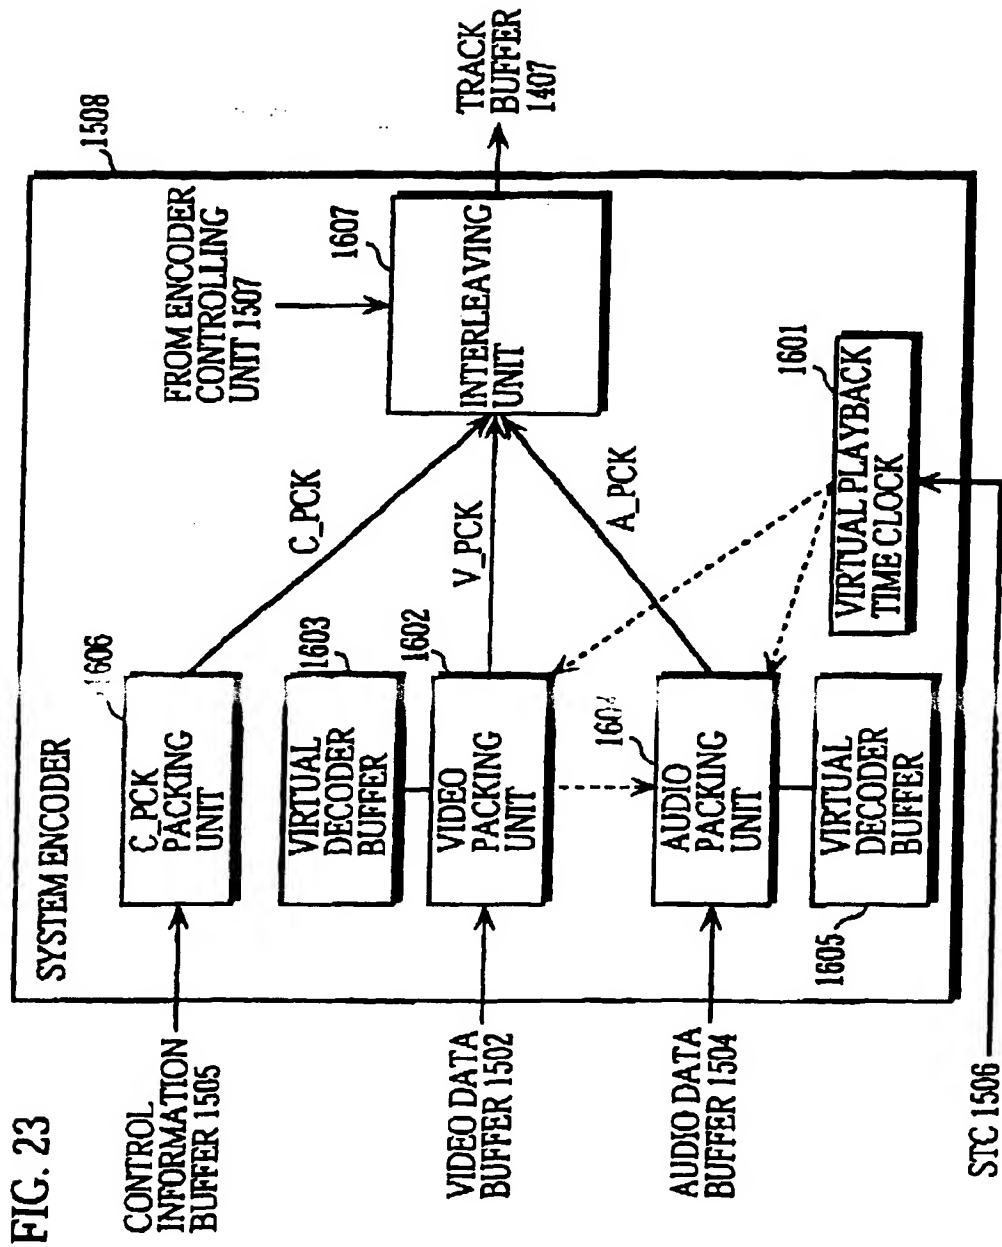


FIG. 24





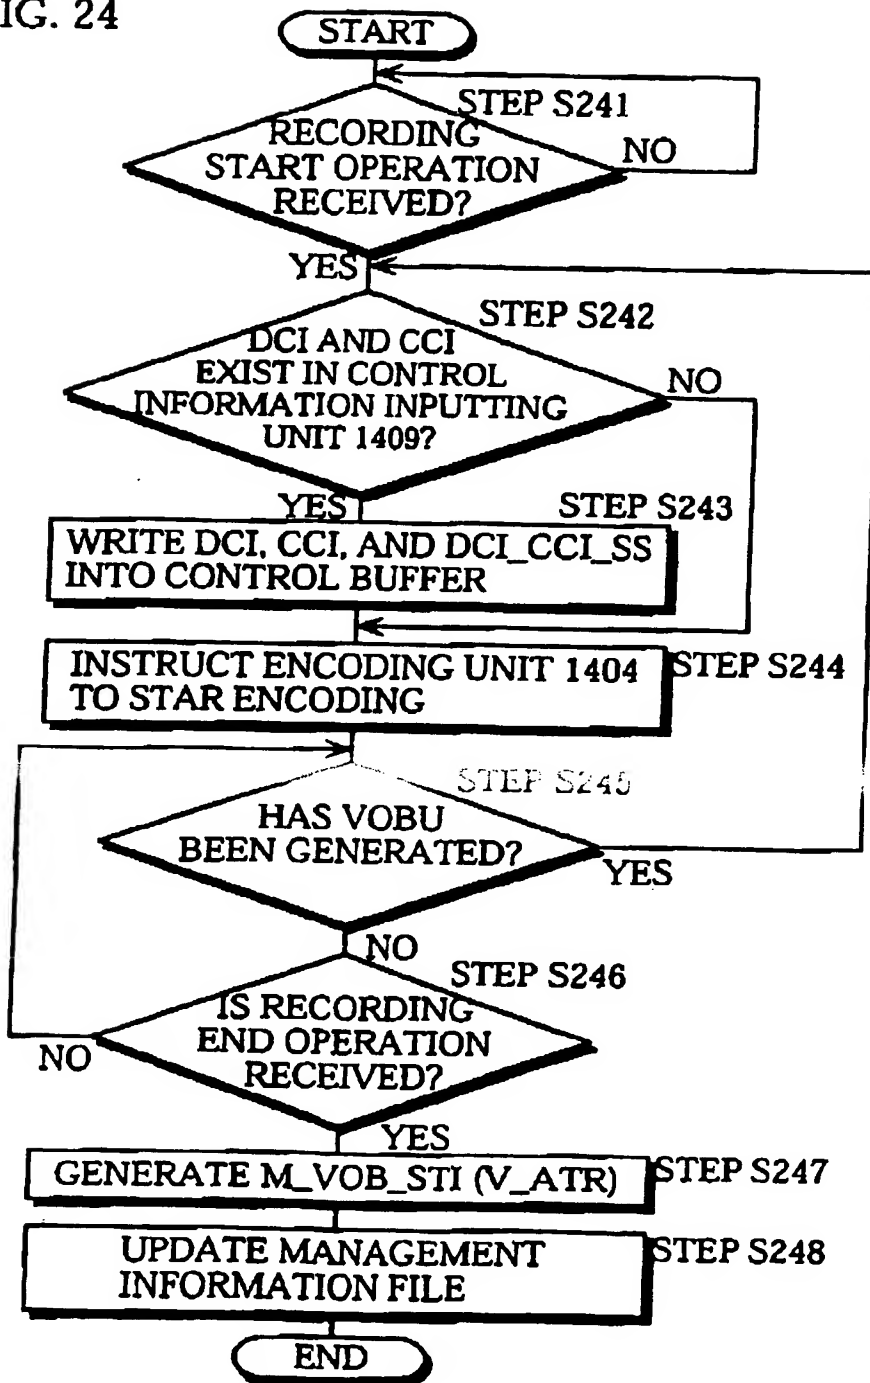

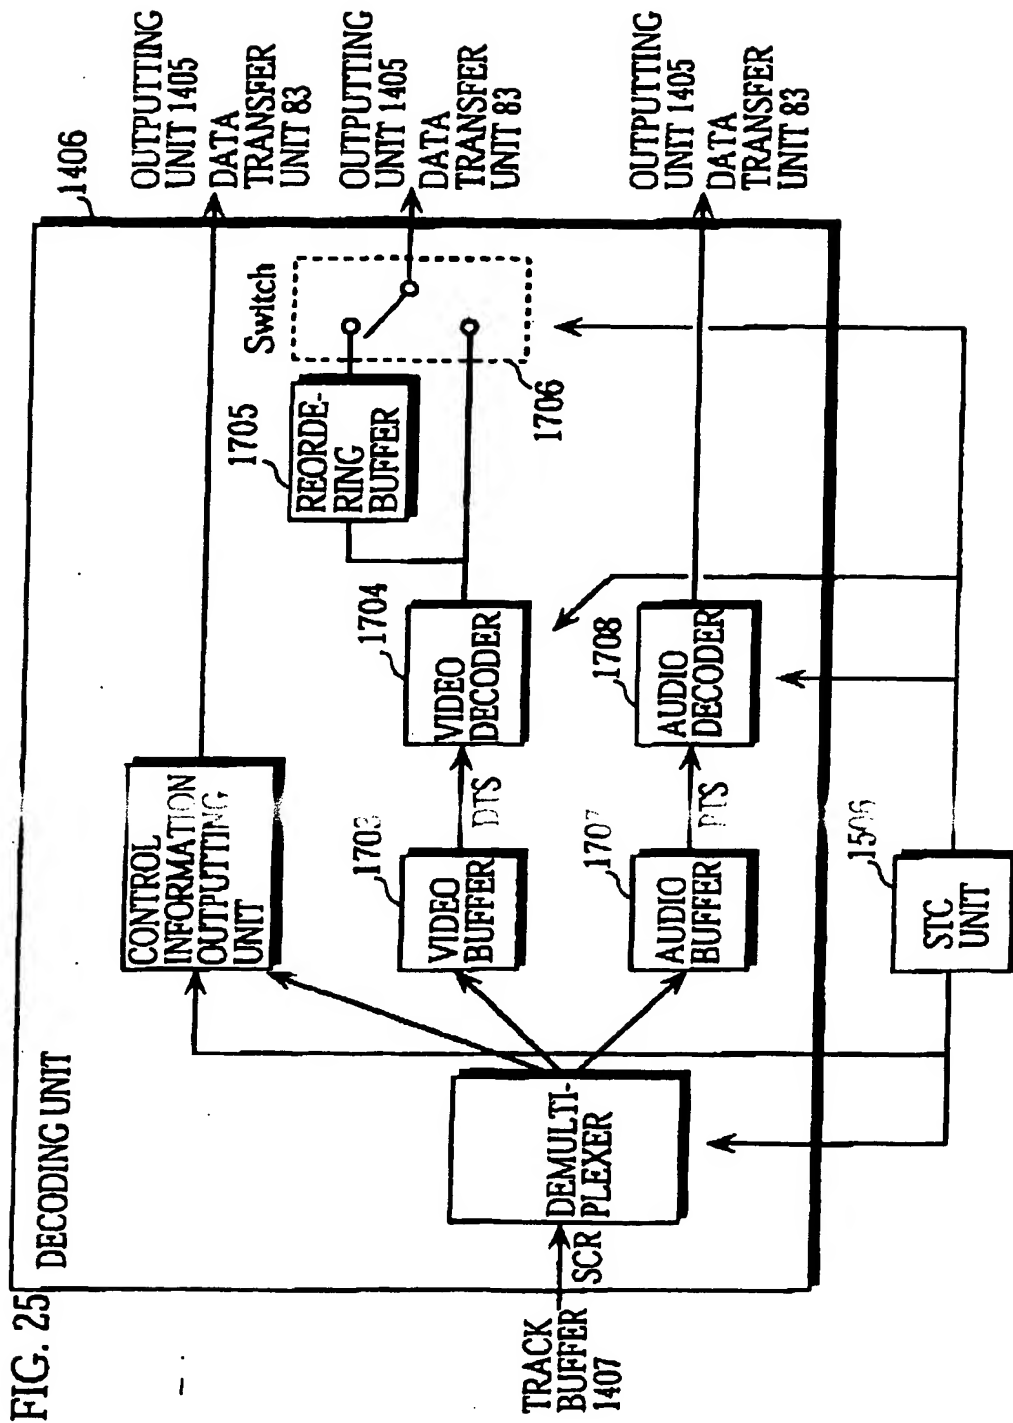

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 11 4681

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IntCl.7)
X	EP 0 724 264 A (KABUSHIKI KAISHA TOSHIBA) 31 July 1996 (1996-07-31) * column 12, line 47 - column 14, line 28 * * column 21, line 3 - column 23, line 12 * * column 26, line 34 - column 40, line 24; figures 1,6,25,45,46,48 *	1,4	H04N5/913 H04N9/82
Y		6,7 2,13,14, 17,26, 27,29, 32-35	
A	--- EP 0 737 008 A (KABUSHIKI KAISHA TOSHIBA) 9 October 1996 (1996-10-09)  * column 13, line 13 - column 14, line 7 * * column 29, line 40 - column 30, line 50; figures 8,35 *	1,2,4, 13,14, 17,19, 20,26, 27,29, 31-35	
Y			TECHNICAL FIELDS SEARCHED (IntCl.7)
A	--- EP 0 795 859 A (PIONEER ELECTRONIC CORPORATION) 17 September 1997 (1997-09-17)  * page 6, line 4 - line 46 * * page 11, line 54 - page 15, line 41; figures 1,12,13 * --- -/--	6,7  1,2,4, 13,14, 17,26, 27,29, 32-35	H04N
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>13 October 2000</b>	Examiner <b>Verleye, J</b>
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/92 (P/C031)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 11 4681

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCl.7)
A	<p>EP 0 789 361 A (MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.) 13 August 1997 (1997-08-13)</p> <p>* column 11, line 12 - column 12, line 49 * * column 15, line 12 - column 16, line 13 * * column 20, line 31 - column 22, line 21; figures 3,4,7,11 * -----</p>	<p>1,3,10, 14,16, 23,27, 28,32, 34,35</p>	
			TECHNICAL FIELDS SEARCHED (InCl.7)
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		13 October 2000	Verleye, J
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1501 (03.82) (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 11 4681

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-10-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 724264 A	31-07-1996	AT 174149 T	15-12-1998
		AT 191292 T	15-04-2000
		CA 2168327 A	31-07-1996
		CN 1134583 A	30-10-1996
		DE 69601039 D	14-01-1999
		DE 69601039 T	24-06-1999
		DE 69607489 D	04-05-2000
		DE 69607489 T	21-09-2000
		EP 0872839 A	21-10-1998
		JP 2747268 B	06-05-1998
		JP 8273304 A	18-10-1996
		JP 2857126 B	10-02-1999
		JP 10074379 A	17-03-1998
		JP 2875237 B	31-03-1999
		JP 10074380 A	17-03-1998
		KR 209846 B	15-07-1999
		KR 209851 B	15-07-1999
		KR 220529 B	15-09-1999
		US 6118927 A	12-09-2000
		US 5870523 A	09-02-1999
EP 737008 A	09-10-1996	JP 8336104 A	17-12-1996
		KR 221425 B	15-09-1999
		KR 221423 B	15-09-1999
		KR 221424 B	15-09-1999
		US 5745643 A	28-04-1998
EP 795859 A	17-09-1997	JP 9251717 A	22-09-1997
		US 5960152 A	28-09-1999
EP 789361 A	13-08-1997	CN 1168054 A	17-12-1997
		EP 0800312 A	08-10-1997
		JP 10079174 A	24-03-1998
		WO 9714249 A	17-04-1997
		US 6047103 A	04-04-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82